


# Backflow Preventer

Sizes 2-1/2" & 3" / 65 mm & 80 mm

Model RPZ **FLOMATIC**

Flomatic Corporation

## Materials

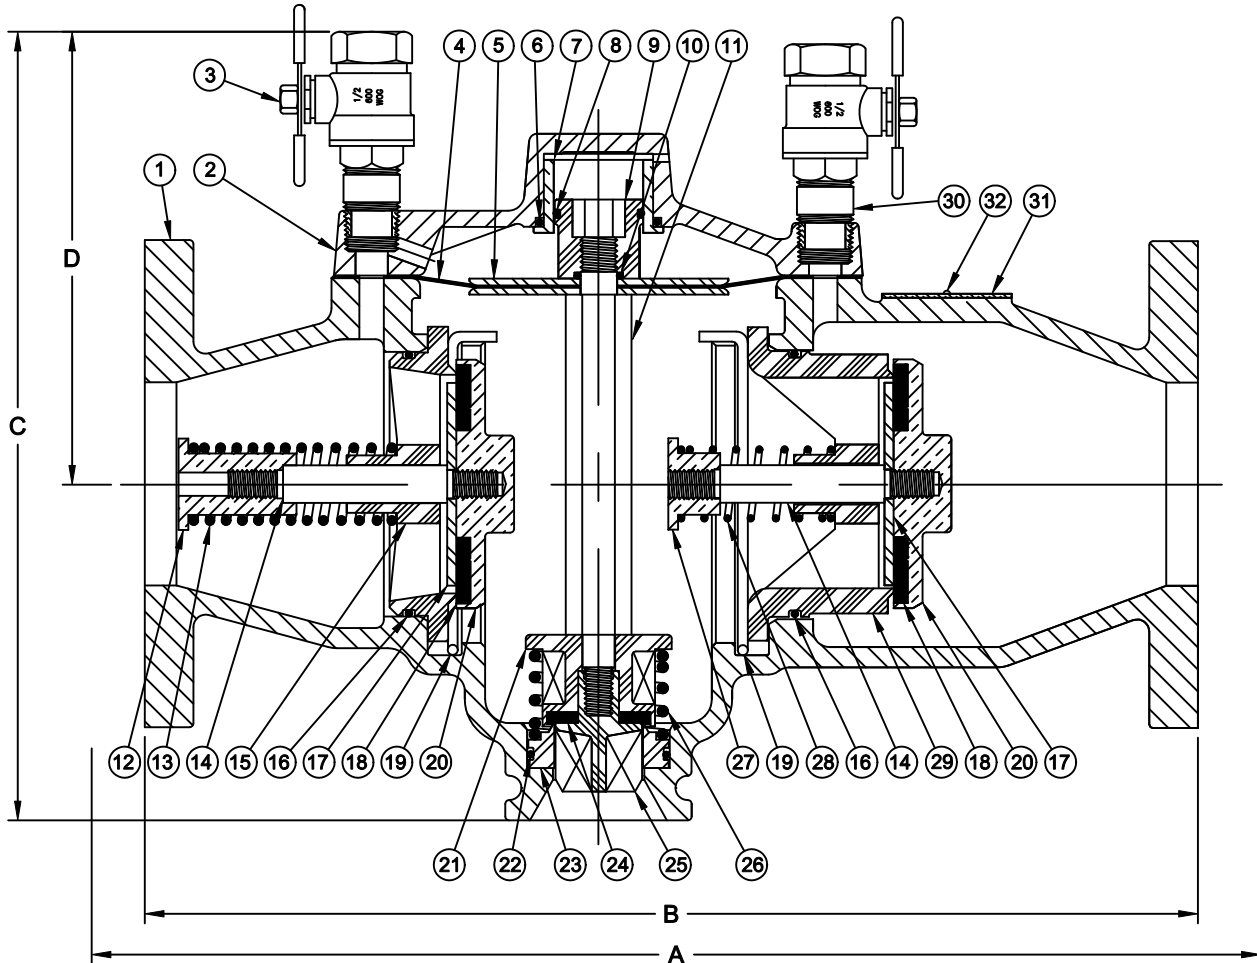

NOTES: DIMENSION A INCLUDES AN AWWA C509 RESILENT WEDGE NRS OR OS&Y TYPE GATE VALVES  
THE INTENDED OPERATING POSITION IS HORIZONTAL

## Dimensions

Max Temp 140°F (60°C)  
Max Pressure 175psi (12 bar)

Size		Part #	A		B		C		D		Wgt with GV		Wgt less GV	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg	lbs	kg
2-1/2	65	B9205	31-1/4	794	16-1/4	413	11-11/16	297	6-5/8	168	164	74.5	60	27
3	80	B9206	32-1/4	819	16-1/4	413	11-11/16	297	6-5/8	168	186	84.5	60	27

Flomatic Valves can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Valves reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Valves. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Valves. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Valves is strictly prohibited.

