


# Backflow Preventer

Sizes 1/2" thru 8" / 15 mm thru 200 mm



## RELIEF VALVE DISCHARGE RATES FOR REDUCED PRESSURE BACKFLOW

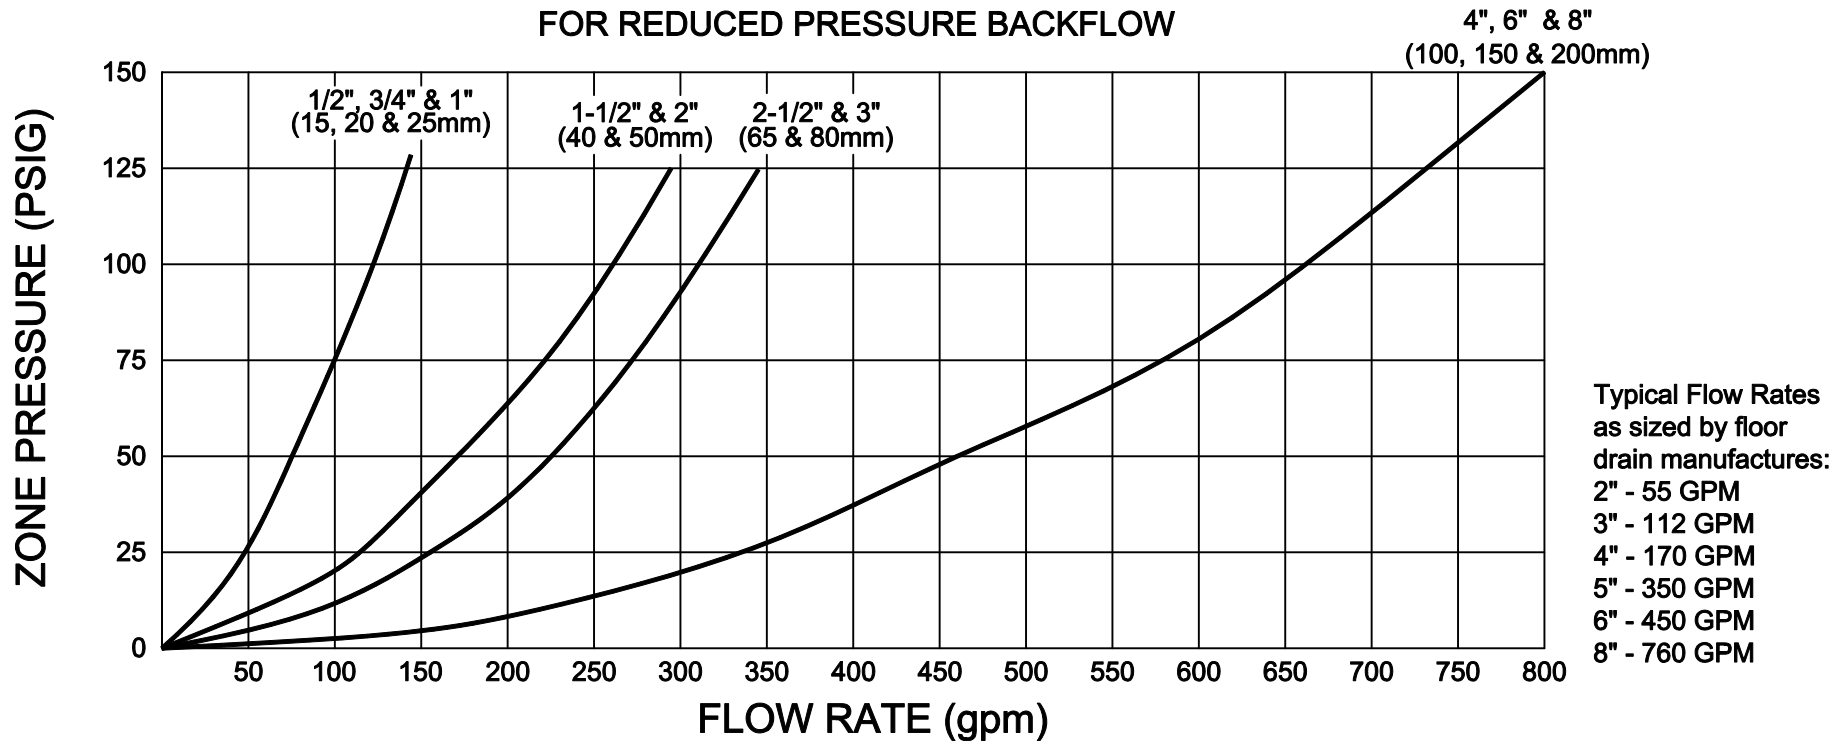

### NOTE: Relief Valve Discharge Rates

Air gap installation with the drain line terminating above the floor drain will enable normal discharge through the relief valve. The floor drain design, however, must be capable of providing adequate drainage to prevent water damage in the event of a failure condition. Please use the flow table listed above for relief valve discharge rates, size and capacity for typical floor drains.

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.