

Air Release Valve


Sizes 2" / 50mm

Miniair®

FLOMATIC®

Flomatic Corporation

Materials

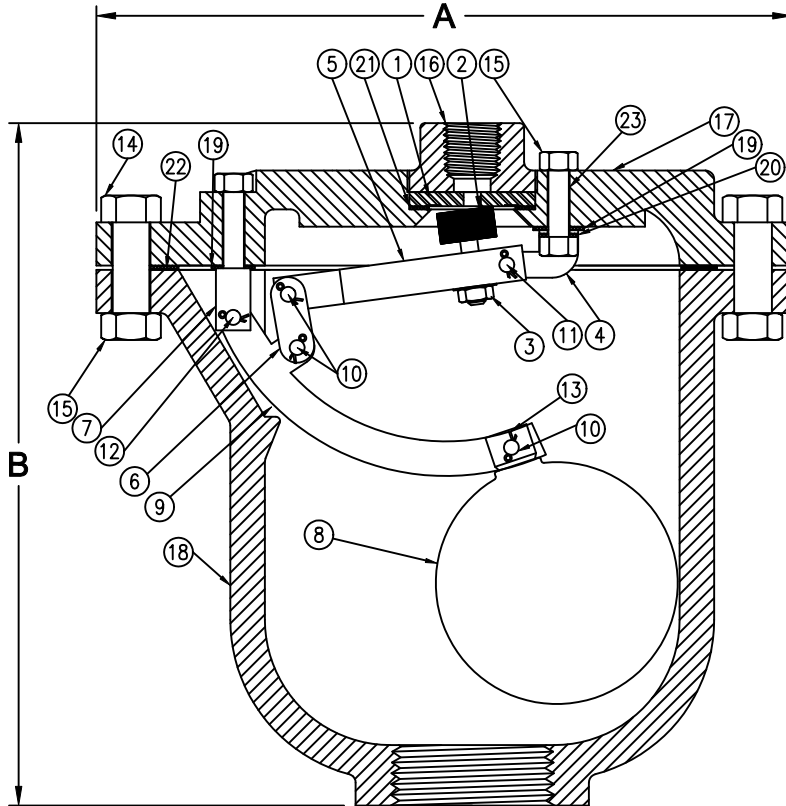

Optional Orifice Ø	Max. Working Pressure
5/32"	300 PSIG
3/16"	250 PSIG
1/4"	200 PSIG
5/16"	150 PSIG
3/8"	100 PSIG

Item #	Description	Material	ASTM	Item #	Description	Material	ASTM
1	*Seat	PVC	----	13	Cotter Pin	Stainless Steel	A313
2	Valve Plunger	Buna-n	A276	14	Bolt	Steel	J429
3	Nut	Stainless Steel	A276	15	Nut	Steel	A563
4	Valve Fulcrum	Stainless Steel	A582	16	**Top	Cast Iron	A126
5	Valve Lever	Stainless Steel	A240	17	**Flange	Cast Iron	A126
6	Link	Stainless Steel	A240	18	**Body	Cast Iron	A126
7	Ball Fulcrum	Stainless Steel	A582	19	Fulcrum Washer	Fibre	----
8	Float	Stainless Steel	A240	20	Fulcrum Washer	Fibre	----
9	Ball Lever	Stainless Steel	A240	21	Seat Gasket	Fibre	----
10	Bearing Pin	Stainless Steel	A582	22	Gasket	Armstrong	N-8090
11	Bearing Pin	Stainless Steel	A582	23	Bolt	Stainless Steel	A276
12	Bearing Pin	Stainless Steel	A582	* Optional Material Stainless Steel **Optional Material Ductile Iron			

Dimensions

Max. Temp 150°F (65C)

Size		Part #	ØA		B		INLET SIZE		OUTLET SIZE		Weight	
Inch	mm		Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs	kg
2	50	6504	10-1/4	260	10-1/2	267	2	50	1/2	15	45	20

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.

FLOMATIC® VALVES

December 29, 1997
Dwg No: S6503-4 Rev B(6/08)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798