

# Ductile Iron Check Valve

# Model 100MLDI




Flomatic Corporation

Sizes 1-1/4" x 1" / 32mm x 25 mm

LEAD FREE  
NSF/ANSI 61



## Materials

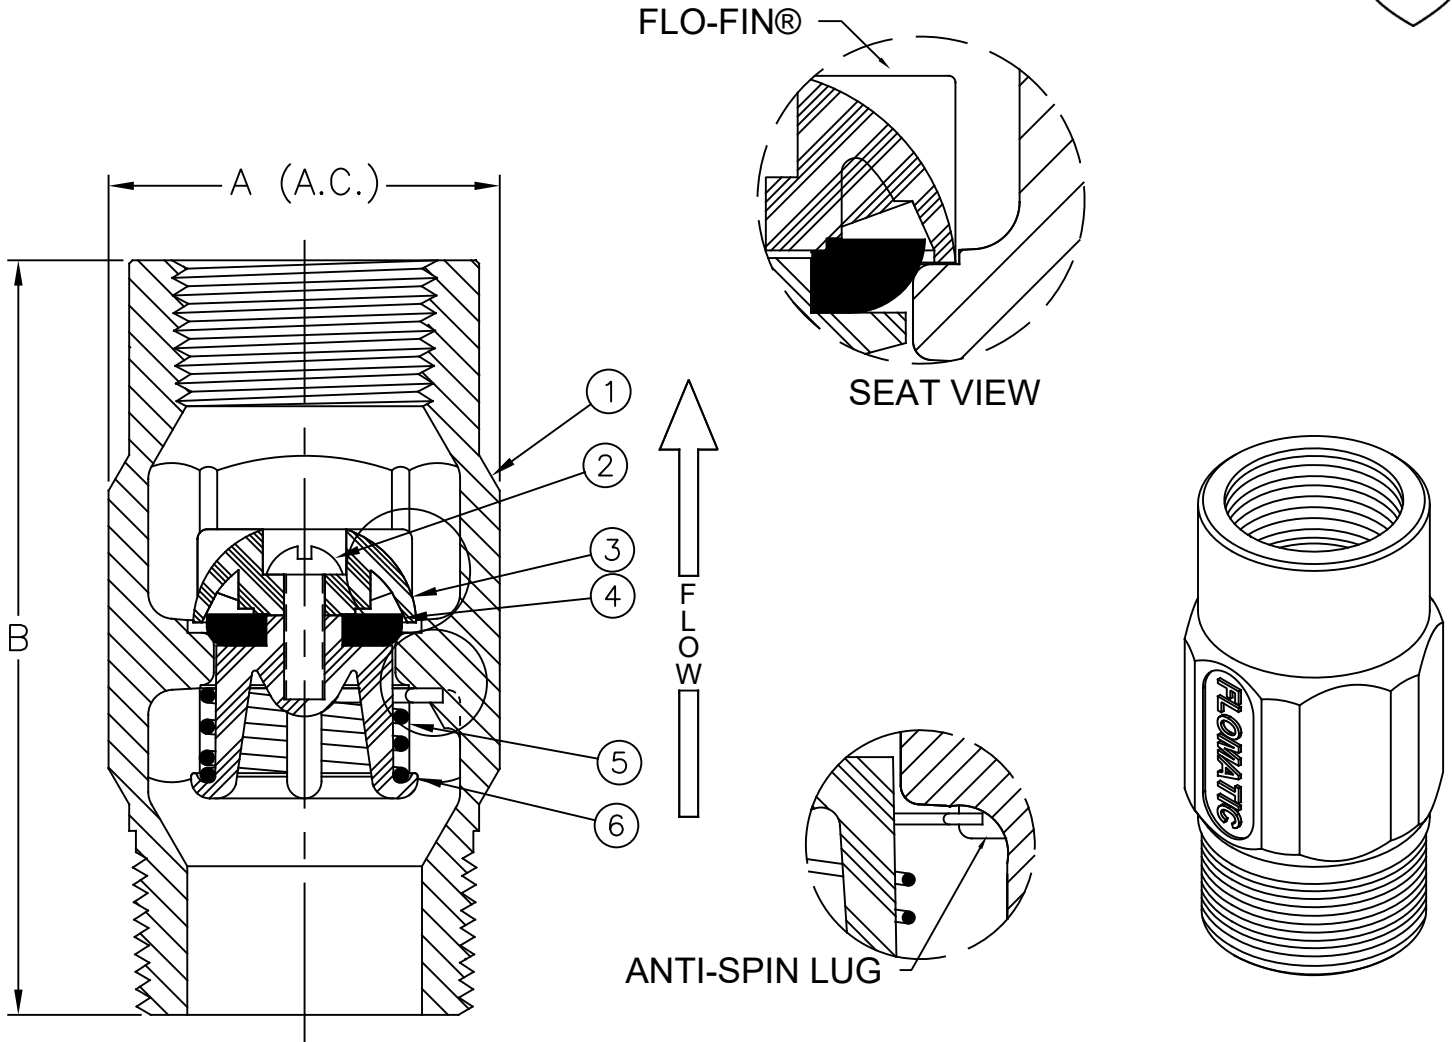

Max Temp 180°F (82°C)  
Max Pressure 400psi (28bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Screw	Stainless Steel	302
3	1	Dome (Flo-Fin)	Delrin	500P
4	1	Rubber Disc	Buna-n	N-5007
5	1	Spring	Stainless Steel	302
6	1	Guide	Celcon	GC10

## Dimensions (1-1/4" MNPT X 1" FNPT)

ANSI B1.20.1

Size		Part #	A		B		MNPT	FNPT	Weight	
inch	mm		inch	mm	inch	mm			lbs	kg
1	25	4221LDI	1.93	49	3.73	95	1-1/4"	1	1	.45

Patent # 4,971,093 & 6,581,633

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. [www.flomatic.com](http://www.flomatic.com)



August 12, 1998  
Dwg No: S4221LDI Rev: H (7/24)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798