
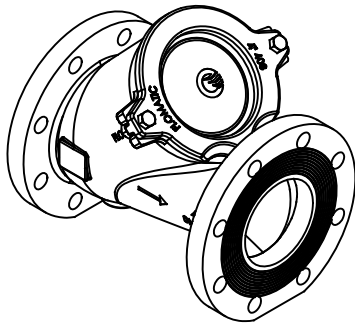
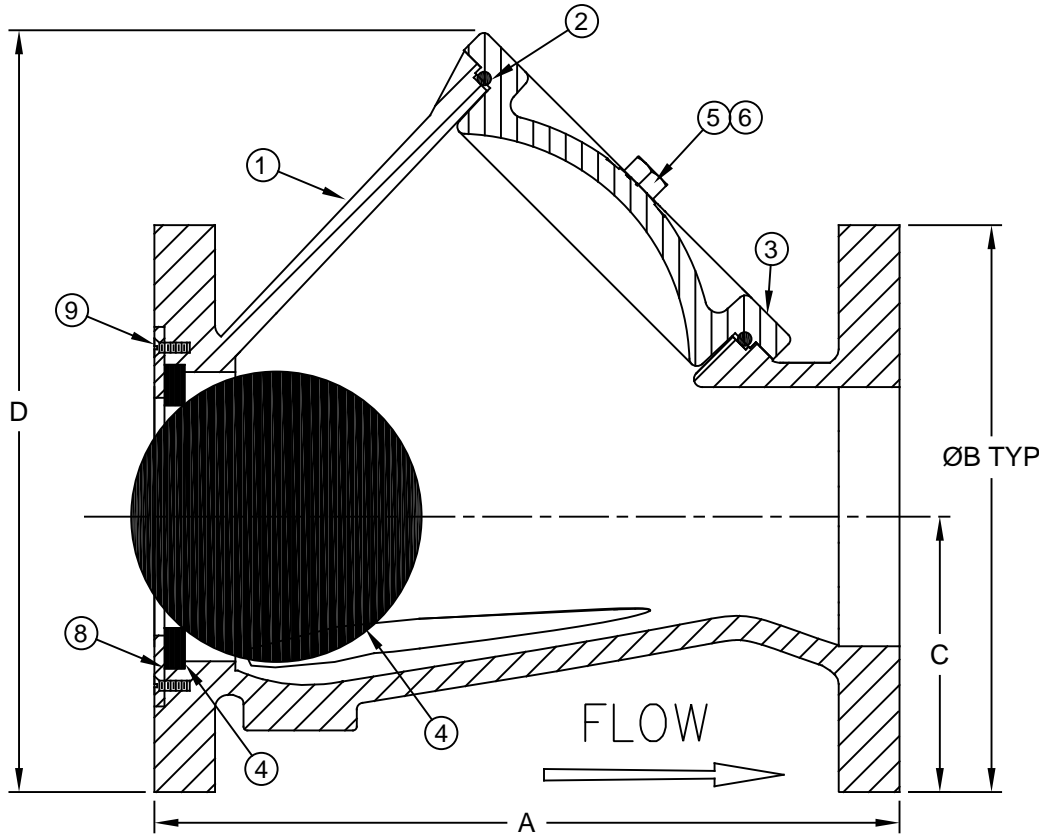


Materials



Max Temp 180°F (82°C)
Max Inlet Pressure 150 psi (10 bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	O'Ring	Buna-n	-----
3	1	Cover (Epoxy Coated)	Ductile Iron	65-45-12
4	1	Ball (sinking)*	Phenolic	-----
5	2	Bolt	Stainless Steel	18-8
6	2	Nut	Stainless Steel	18-8
7	1	Seal	Polyurethane	-----
8	1	Retaining Ring	Stainless Steel	304
9	6	Flat Head Cap Screw	Stainless Steel	304

Dimensions

*Optional floating ball available add "FB" to part number

Size		Part #	A		B		C		D		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
4	100	2045-1	11-1/2	292	9	229	4-1/4	108	11-3/4	298	56	26

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2017 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com