

Foot Valve


Model 812XTF



Flomatic Corporation

Sizes 3" & 4" / 75mm & 100mm

Material

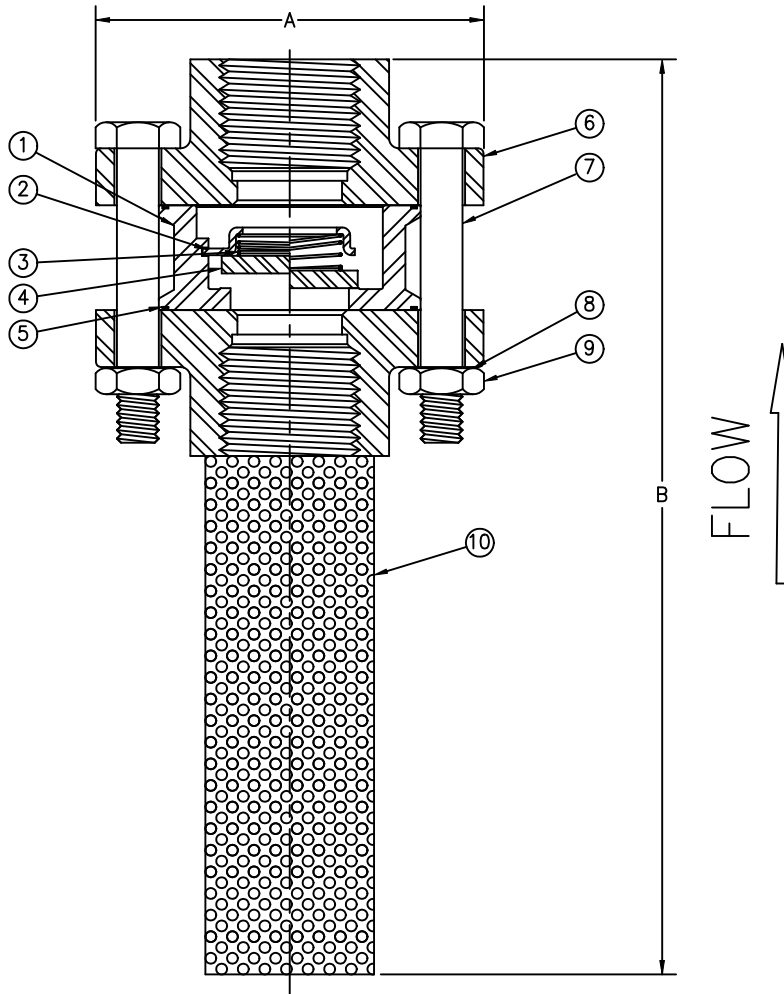

Open Area: 25-30%
 Max Temp 400°F (200°C)
 Max Pressure 300psi (21bar)

| Item # | Qty | Description | Material | ASTM | Item # | Qty | Description | Material | ASTM |
|--------|-----|-------------|-----------------|------|--------|-----|---------------|-----------------|------|
| 1 | 1 | Body | Stainless Steel | 316 | 6 | 2 | Flange | Stainless Steel | 316 |
| 2 | 1 | Holder | Stainless Steel | 316 | 7 | A/R | Hex Head Bolt | Stainless Steel | 316 |
| 3 | 1 | Spring | Stainless Steel | 316 | 8 | A/R | Washer | Stainless Steel | 316 |
| 4 | 1 | Disc | Stainless Steel | 316 | 9 | 1 | Hex Head Nut | Stainless Steel | 316 |
| 5 | 2 | Seal | PTFE | — | 10 | 1 | Screen | Stainless Steel | 316 |

A/R=Amount Required

Dimensions

| Size | | Part # | A | | B | | Weight | |
|------|-----|---------|---------|-----|--------|-----|--------|----|
| inch | mm | | inch | mm | inch | mm | lbs | kg |
| 3 | 75 | 2427XTF | 7-3/4 | 197 | 9-1/8 | 232 | 25 | 11 |
| 4 | 100 | 2428XTF | 8-13/16 | 224 | 10-1/4 | 260 | 39 | 18 |

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



August 28, 1996
 Dwg No: S812XTF2 Rev: C (8/11)

FLOMATIC CORPORATION
 GLENS FALLS, N.Y. 12801
 PHONE (518) 761-9797
 FAX (518) 761-9798