



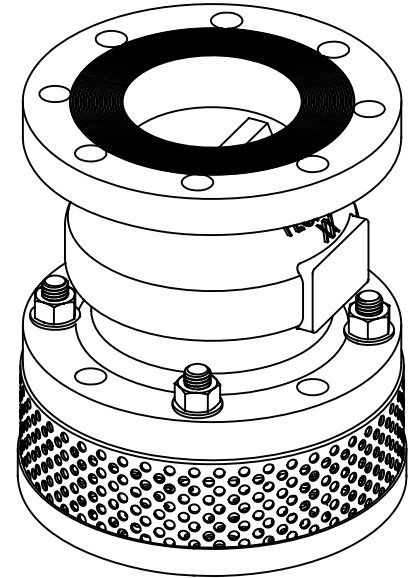

## Material

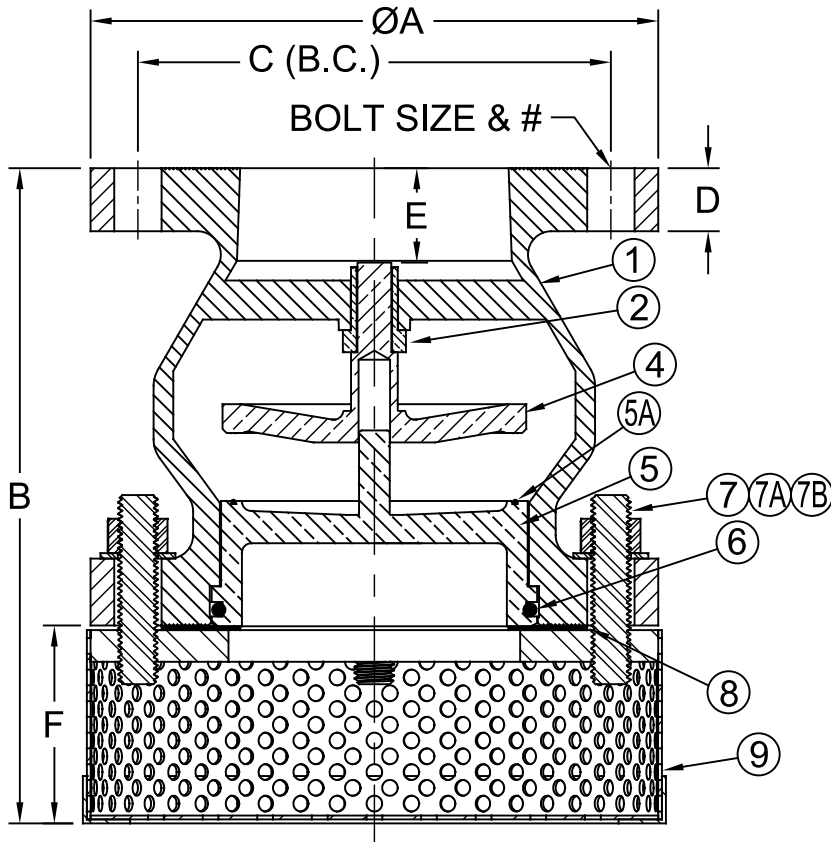

Max Temp 180°F (82°C)  
Max Pressure 180psi (14bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12	7	4	Stud	Stainless Steel	18-8
2	1	Bushing	Bronze	C95400	7A	4	Nut	Stainless Steel	18-8
4	1	Poppet	Bronze	C87800	7B	4	Washer	Stainless Steel	18-8
5	1	Seat Ring	Bronze	C87800	8	1	Gasket	Vellumoid	-----
5A	1	O-Ring	EPDM	5778-70	9	1	Screen	Stainless Steel	316
6	1	O-Ring	EPDM	5778-70					

Open Area: 58-60%

## Dimensions (150# ANSI B16.42 Flanges)

Patent # 6,024,121

Size		Part #	ØA		B		ØC		D		E		F		Bolt Size	# of Bolts	Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm			lbs	kg
2	50	4763BT	6.00	152	8.31	211	4.75	121	.63	16	1.14	29	3	76	5/8	4	17	8
2-1/2	65	4768BT	7.00	178	8.63	219	5.50	140	.69	17	.88	22	3	76	5/8	4	24	11
3	80	4769BT	7.50	191	9.14	232	6.00	152	.75	19	1.06	27	3	76	5/8	4	29	13
4	100	4770BT	9.00	229	10.39	264	7.50	191	.94	24	1.50	38	3	76	5/8	8	48	22
5	125	4771BT	10.00	254	12.63	321	8.50	216	.94	24	1.75	44	4	102	5/8	8	64	29
6	150	4772BT	11.00	279	15.89	404	9.50	241	1.00	25	2.45	62	6	152	3/4	8	89	41

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2025 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com