

**CAUTION**

Installation of this product **MUST** be performed by qualified, licensed personnel. Faulty installation could result in an improperly functioning device.


**INSTALLATION****FAILURE TO FOLLOW THESE INSTRUCTION WILL VOID ANY WARRANTY**

The installer should be sure the proper device has been selected for the particular installation.


Model CB20 is designed for installation on carbonated beverage dispensing systems, as well as non-carbonated systems, to prevent Carbon dioxide (CO<sub>2</sub>) gas or carbonated water from coming in contact with copper potable water supply line.

Proper performance depends upon following these installation instructions and prevailing governmental and industry standards and codes. Failure to do so releases FLOMATIC CORPORATION of any liability that it might otherwise have with respect to that device.

1. Prior to installation of the CB20, pipe lines should be flushed thoroughly to remove all sediment, pipe scale and other foreign material.
2. The CB20 can be installed in a horizontal or vertical position, in an accessible location to facilitate servicing. The valve should not be installed where discharge could cause damage to nearby equipment or property.
3. Install the valve with the arrow on the valve body pointing in the direction of the flow.
4. Connect a vent discharge line to the vent outlet and direct to a safe place of disposal with adequate ventilation per local and government codes.
5. **CAUTION: Under certain backflow conditions the CB20 will discharge water from the vent port. The vent port should never be directly piped into a drainage ditch, sewer or pump. Under no circumstances should the vent port or drain line be plugged.**
6. It is important that the CB20 be inspected periodically for any discharge from the vent port which will provide a visual indication of the need for maintenance or repair of the valve.
7. Copper tubing shall not be used downstream of the CB20.

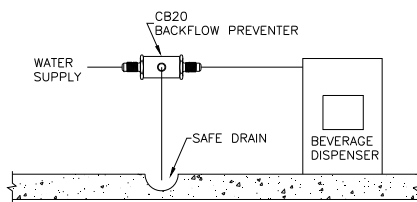

NON-CARBONATED BEVERAGE SYSTEM

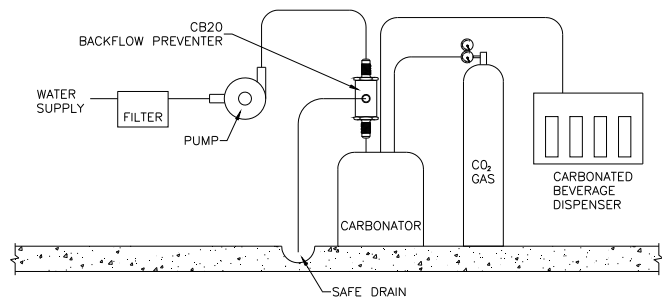

CARBONATED BEVERAGE SYSTEM

**1 Year Limited Warranty:** Flomatic valves are guaranteed against defects of materials or workmanship when used for the services recommended. If in any recommended service, a defect develops due to material or workmanship, and the device is returned, freight prepaid, to Flomatic Corporation within 12 months from the date of purchase, it will be repaired or replaced free of charge. Flomatic Corporations' liability shall be limited to our agreement to repair or replace the valve only.