



Control Valve Cycle Gard® I Model C152ET



Flomatic Corporation

Sizes 1" / 25 mm
Direct Acting Pump Control

Materials

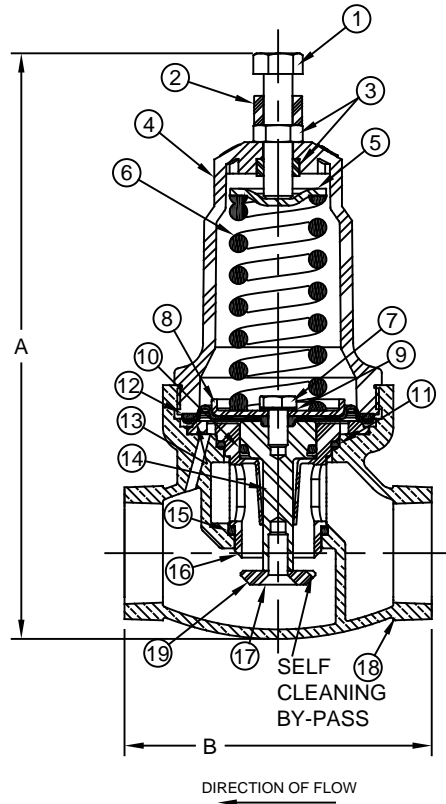

Item #	Qty	Description	Material	Item #	Qty	Description	Material
1	1	Adjusting Screw	Steel	11	1	O'Ring	Buna-n
2	1	Spacer	ABS	12	1	Diaphragm	Nitrile/Nylon
3	2	Jam Nut	Steel	13	1	Friction Ring	Brass C36000
4	1	Cover	Noryl	14	1	Stem	Stainless Steel 304
5	1	Spring Button	Steel	15	1	O-Ring	Buna-n
6	1	Spring	Steel	16	1	Cartridge	Delrin
7	1	HHCS	Stainless Steel 18-8	17	1	Screw	Stainless Steel 18-8
8	1	Diaphragm Plate	Steel	18	1	Body	Bronze C89833
9	1	Tooth Lock Washer	Steel	19	1	Disc (Slotted)	Stainless Steel 303
10	1	O'Ring	Buna-n	Part Number C152001ET 15-75 psi Part Number C152101ET 15-150 psi			

Dimensions

Max Temp: 180°F (82°C)
Max Inlet Pressure 400psi (27bar)

Size		Part #	A		B		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
1	25	C152001ET	7-5/8	194	4	102	3.3	1.5

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2018 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



November 6, 2018
Dwg No: SC152001ET Rev: 0

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798