
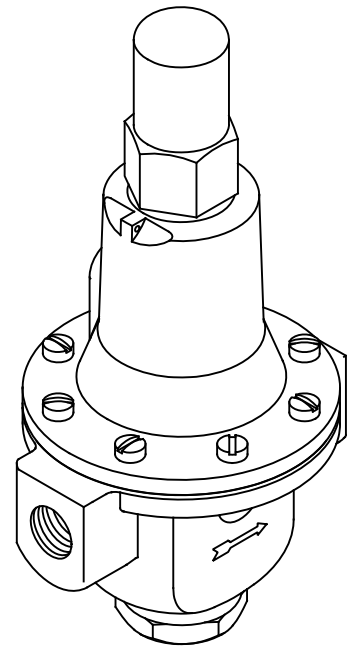


Materials (Stainless Steel)

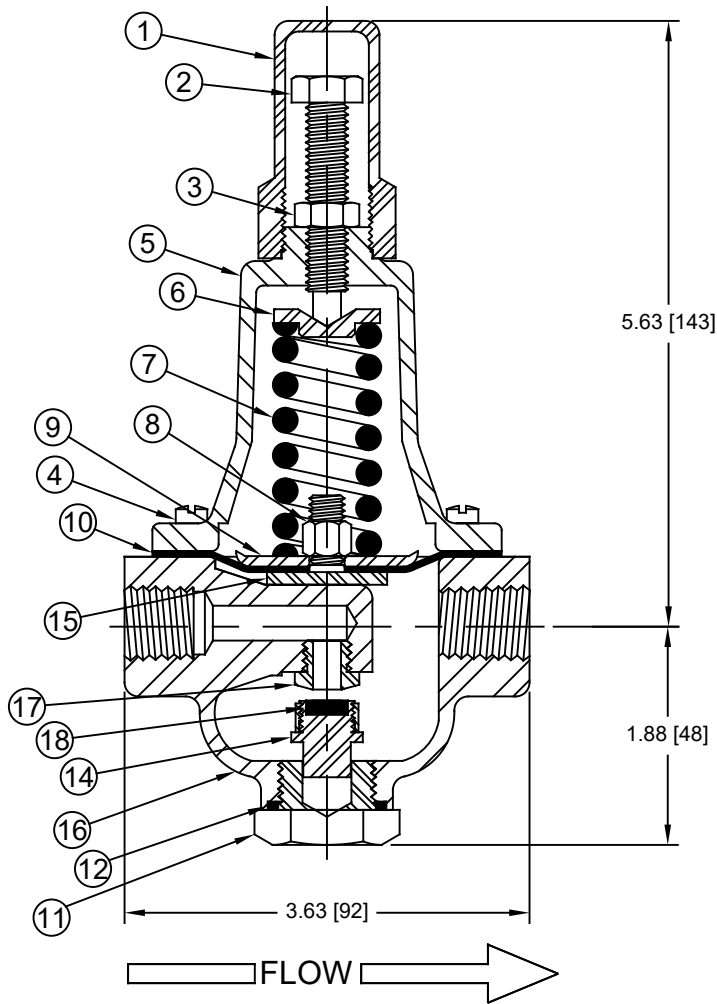

PILOT TYPE			
PSI RANGE	FACTORY SET @ PSI	SPRING NUMBER	ASSEMBLY NUMBER
5-80	30	9600397A	152100SA
25-125	60	9600397B	152100SB
2-35	15	9676000	152100SC
30-300	60	9600397D	152100SD

FNPT ANSI B1.20.1

Max Temp 180°F (82°C)
Max Pressure 400psi (28bar)

Item #	Qty	Description	Material	Item #	Qty	Description	Material
1	1	Adjustment Cap	ABS	10	1	Diaphragm	Buna-n/Nylon
2	1	Adjusting Screw	Stainless Steel 18-8	11	1	Body Plug	Stainless Steel 316
3	1	Jam Nut	Stainless Steel 18-8	12	1	O-Ring	Buna-n
4	8	Fillister Head Slotted Screw	Stainless Steel 18-8	13	1	3/8" Plug (not shown) Optional	Stainless Steel 316
5	1	Cover	Stainless Steel 316	14	1	Disc Retainer	Stainless Steel 316
6	1	Spring Button	Stainless Steel 304	15	1	Yoke	Stainless Steel 316
7	1	Spring	Steel	16	1	Body	Stainless Steel 316
8	1	Nut	Galvanized Steel	17	1	Seat	Stainless Steel 304
9	1	Diaphragm Plate	Stainless Steel 316	18	1	Disc	Buna-n

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com