

**AWWA C515 (NRS) Gate Valve****Specification Submittal Sheet****Flomatic Corporation**

Model 115NPT

Sizes: 2" - 6"

FNPT x FNPT Connection

**MATERIALS:**

Valve Body & Covers	Ductile Iron ASTM A536 Gr 65-45-12
Coating	AWWA compliant C-550 & FDA Compliant (Inside & Out)
Wedge	Ductile Iron ASTM A536 Gr 65-45-12 With EPDM coating
Elastomers	EPDM FDA approved
Fasteners	304 Stainless Steel
Stem	420/304 Stainless Steel

**FEATURES:****Sizes:** □ 2" □ 3" □ 4" □ 6"

Max. working water pressure 250 PSI (1723 kPa)

Max. working water temperature 120°F (48°C)

Hydrostatic test pressure 400 PSI (2758 kPa)


End connection ANSI/ASME B16.1

Optional handwheel add "HW" to end of part #

Opens Left turn (counterclockwise)

**STANDARDS COMPLIANCE:**

- AWWA Compliant C-515

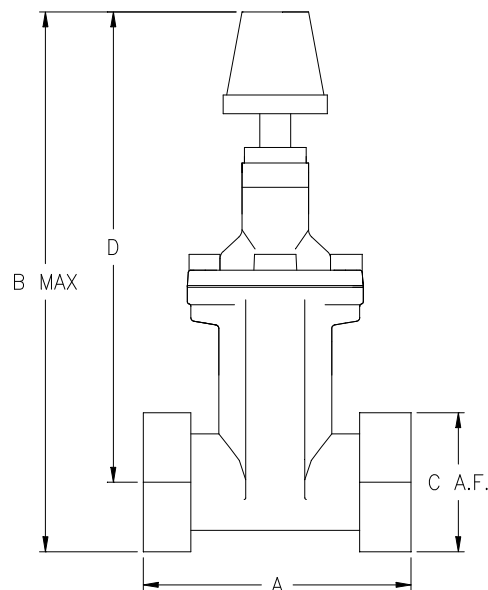

Size (FNPT)		Part #	A		B		C		D		WEIGHT	
Inch	mm		Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs	kg
2	65	8560NPT	7.3	186	12	305	3.5	89	10.3	262	20	9
3	80	8562NPT	8	203	14	356	4.4	112	11.7	298	32	15
4	100	8563NPT	9	229	16.5	419	5.6	142	13.8	350	47	21
6	150	8564NPT	10.5	267	22.2	565	7.5	190	18.5	470	85	39

**WARRANTY:** Flomatic valves are guaranteed against defects of materials or workmanship when used for the services recommended. If in any recommended service, a defect develops due to material or workmanship, and the device is returned, freight prepaid, to Flomatic Corporation within 12 months from the date of purchase, it will be repaired or replaced free of charge. Flomatic Corporations' liability shall be limited to our agreement to repair or replace the valve only.

Flomatic Corporation, 15 Pruyn's Island, Glens Falls, New York 12801  
Phone: 518-761-9797 Fax: 518-761-9798 www.flomatic.com



April 3, 2014 Rev. 2 (12/24)  
Specification Sheet NRS\_NPT-C515