

Backflow Preventer

Sizes 1-1/4" / 32mm

Model GF80S6




Glen-Flo® Valves

LEAD FREE
NSF/ANSI 61



Materials

DUAL CHECK
MODEL GF80S6
S/N SIZE: 1-1/4"
GLEN-FLO
FLOW
175PSI/180°F

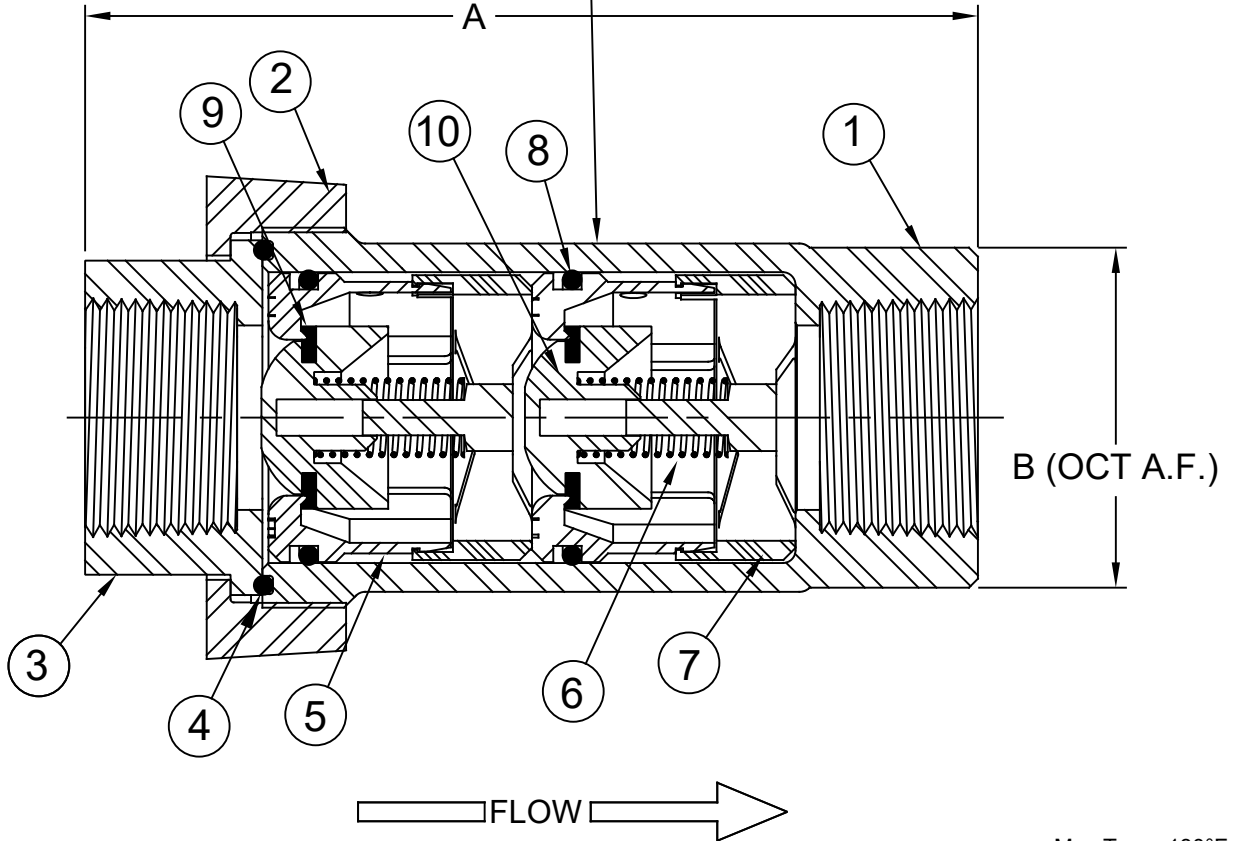

Max Temp 180°F (82°C)
Max Pressure 175psi (12bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Stainless Steel	316	6	2	CV Spring	Stainless Steel	316
2	1	Tailpiece Nut	Stainless Steel	316	7	2	CV Spring Retainer	Celcon	-----
3	1	Tailpiece	Stainless Steel	316	8	2	CV O'Ring	Buna-n	-----
4	1	Tailpiece O'Ring	Buna-n	-----	9	2	CV Disc	Silicone Rubber	Grade 40
5	2	CV Housing	Celcon	-----	10	2	CV Poppet	Noryl GFN2-780S	-----

CV = Check Valve

Dimensions (FNPT x FNPT)

ANSI B1.20.1

Size		Part #	A		B		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
1-1/4	32	GF8082S6	4.41	112	1.84	35	2.2	1.0

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited. www.fromatic.com



November 25, 2016
Dwg No: S8082S6 Rev: C (5/24)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798