


Materials

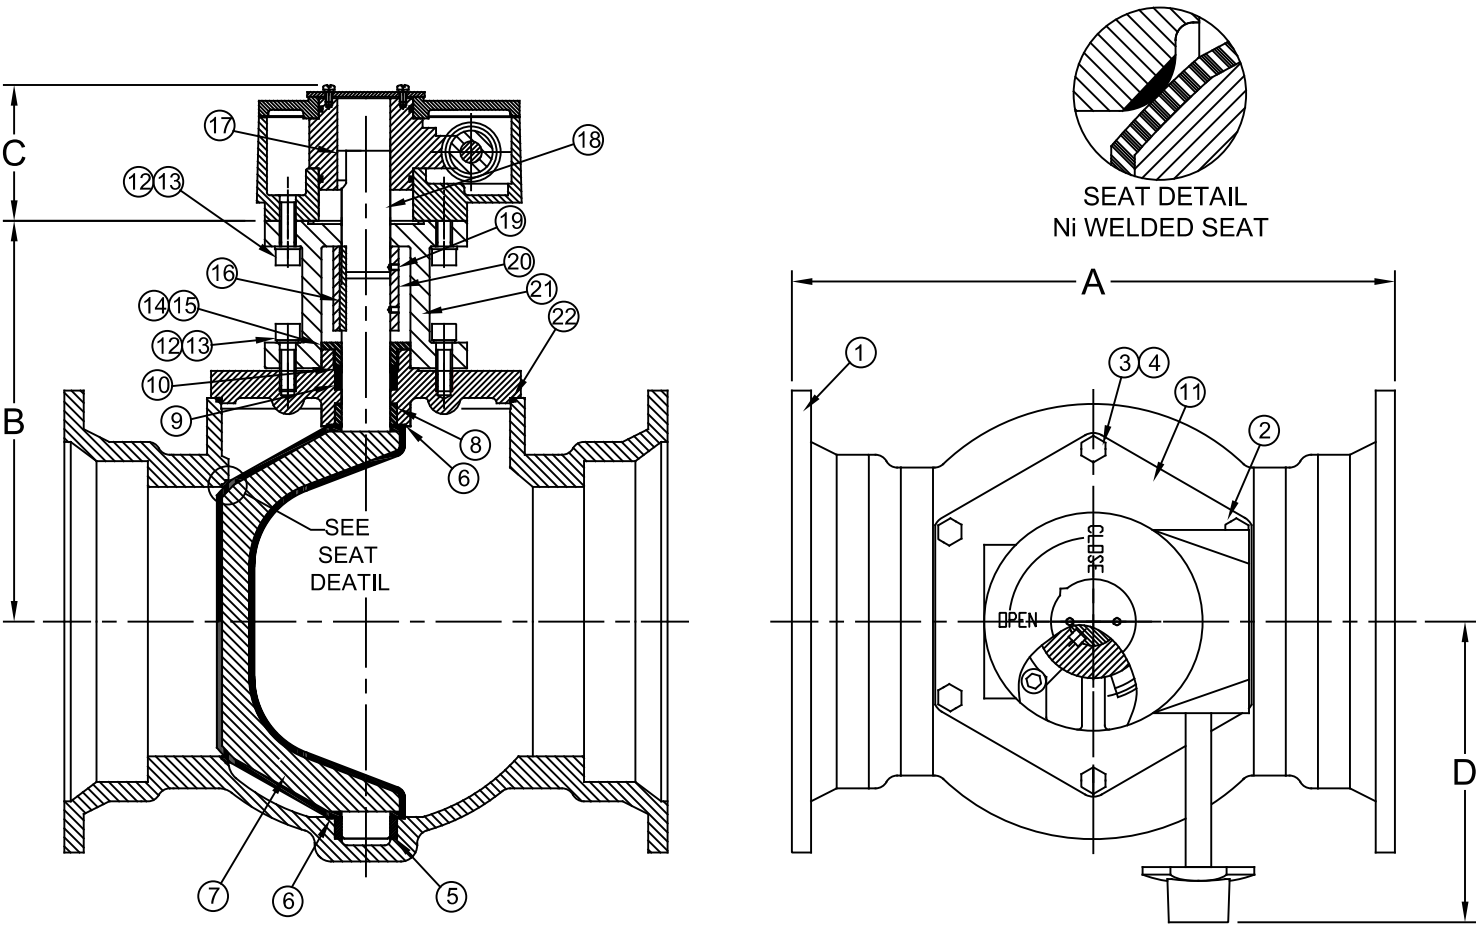

Max Temp 180°F (82°C)
Max Pressure 200 psi (14 bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Ductile Iron	A536 (65-45-12)	12	8	Bolt	Carbon Steel	A307B
2	1	Gear Box	Ductile Iron	A536 (65-45-12)	13	8	Washer	Carbon Steel	A570
3	6	Bolt	Stainless Steel	304	14	1	Pad	Brass	C2800
4	6	Washer	Stainless Steel	304	15	1	Gland	Carbon Steel	1450
5	?	Bushing	Stainless Steel	316	16	1	Key	Carbon Steel	1450
6	2	Washer	PTFE	----	17	1	Key	Carbon Steel	1450
7	1	Plug	DI w/ NBR	A536 (65-45-12)	18	1	Extended Shaft	Carbon Steel	1450
8	1	A-Packing	NBR	----	19	2	Bolt	Carbon Steel	A307B
9	4	B-Packing	NBR	----	20	1	Bushing	Carbon Steel	1450
10	1	C-Packing	NBR	----	21	1	Shelf	Ductile Iron	A536 (65-45-12)
11	1	Cover	Ductile Iron	A536 (65-45-12)	22	1	O-ring	NBR	-----

MANUFACTURED IN
COMPLIANCE WITH
AWWA C517 STANDARD

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2025 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

