
Model 80HTE FLAMATIC®


Flomatic Corporation

Materials



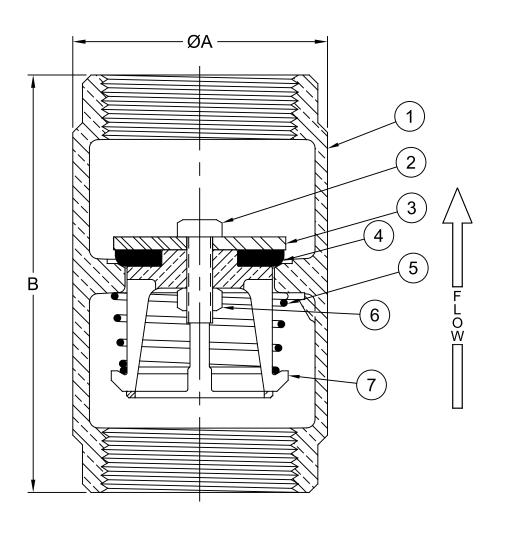

Sizes 2-1/2" & 3" / 65 mm thru 75 mm

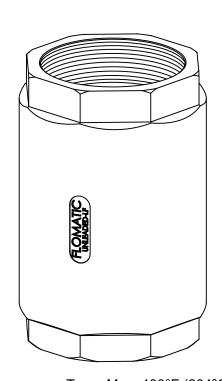

Temp Max: 400°F (204°C) Pressure Max: 100 psi (6.8 bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833	5	1	Spring	Stainless Steel	304
2	1	Bolt	Stainless Steel	304	6	1	Nut	Stainless Steel	302
3	1	Washer**	Stainless Steel	304	7	1	Guide*	Stainless Steel	316
4	1	Disc	Viton					* 2-1/2" is Unleaded Bro	nze C89833

**3" is Unleaded 18-8SS

Dimensions (FNPT x FNPT)

ANSI B1.20.1

Size		D 1 #	ØA		В		NDT	Weight	
inch	mm	Part #	inch	mm	inch	mm	NPT	lbs	kg
2-1/2	65	4035HTE	3.69	94	6.06	154	2-1/2	6.5	3
3	80	4036HTE	4.53	115	6.95	177	3	13	5.9

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

