Enviro® Check Valve


Model 80XBEVFD FLAMATIC®


Flomatic Corporation

Sizes 1" / 25 mm Double Tap

Materials



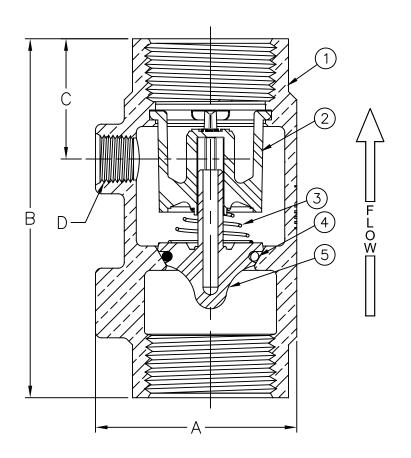



Max Temp 180°F (82°C) Max Pressure 400 psi (28bar)

Iten	n #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1		1	Body	Unleaded Bronze	C89833	4	1	O-Ring	Bina-N	N60000AA
2		1	Guide	Celcon®	M90	5	1	Poppet*	Celcon®	M90
3		1	Sprina	Stainless Steel	302			*01	otional SS add an S bet	ween E & VFD

Dimensions (FNPT x FNPT)

Patent #'s 8,978,696 ,D718,429

ANSI B1.20.1

Siz	:e	D 1#	Α		В		С		D (Outlet NPT)	Weight	
inch	mm	Part #	inch	mm	inch	mm	inch	mm	inch	lbs	kg
1	25	7961EVFD	2-3/32	53	3-3/4	95	1-1/4	32	1/4	1.30	.59

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2021 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawingsor information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited, www.flomatic.com

