Enviro Check®

Model 80HTE

Sizes 1-1/2" / 40 mm

FLOMATIC®
Flomatic Corporation

LOW-LEAD
IAPMO R&T
NSF/ANSI 372

Materials

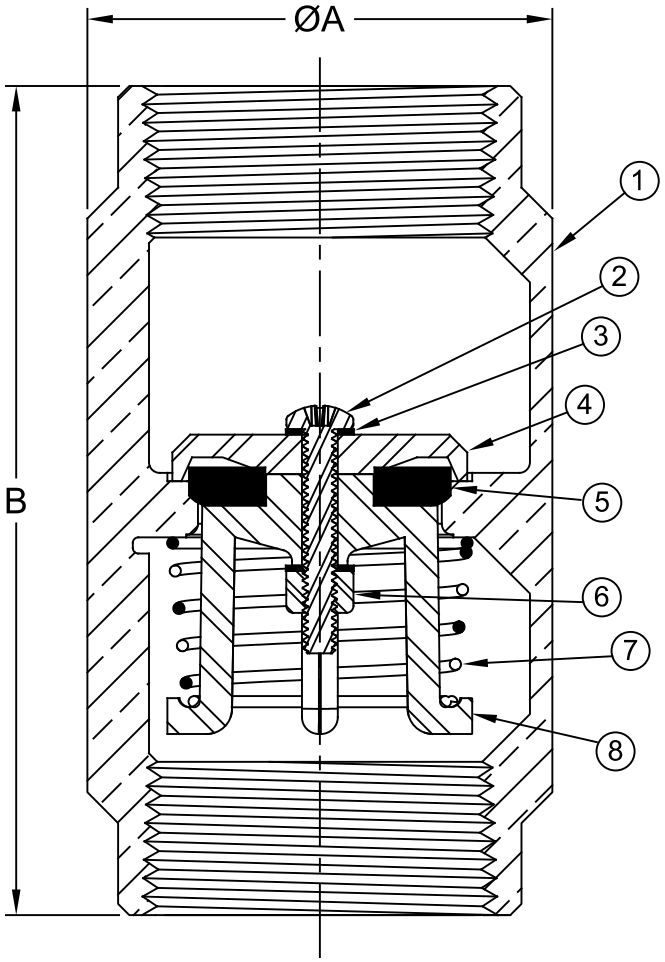

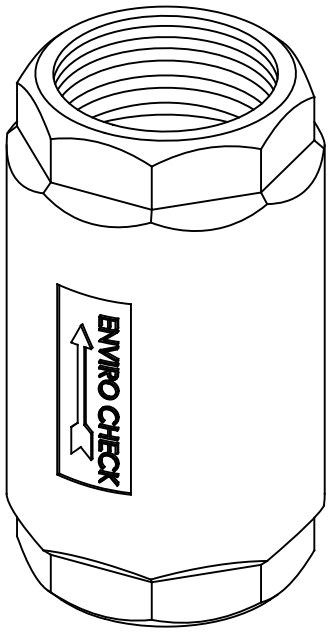

Temp Max: 400°F (204°C)
Pressure Max: 100 psi (6.8 bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833	5	1	Disc	Viton	80FC2181
2	1	Screw	Stainless Steel	316	6	1	Nut	Stainless Steel/Nylon	304/N200SL
3	2	Washer	Nylon	42A NCO10	7	1	Spring	Stainless Steel	302
4	1	Dome	Stainless Steel	316	8	1	Guide	Stainless Steel	316

Dimensions (FNPT x FNPT)

Patent #'s 4,971,093 & 6,581,633

ANSI B1.20.1

Size		Part #	ØA		B		NPT	Weight	
inch	mm		inch	mm	inch	mm		lbs	kg
1-1/2	40	4033HTE	2.60	66	4.63	118	1-1/2	2.63	1.19

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC® VALVES

March 4, 2021
Dwg No: S4033HTE Rev: A (8/24)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798