Enviro Check®

Model 80HTE

Sizes 3/4" / 20 mm

Flomatic Corporation

Materials

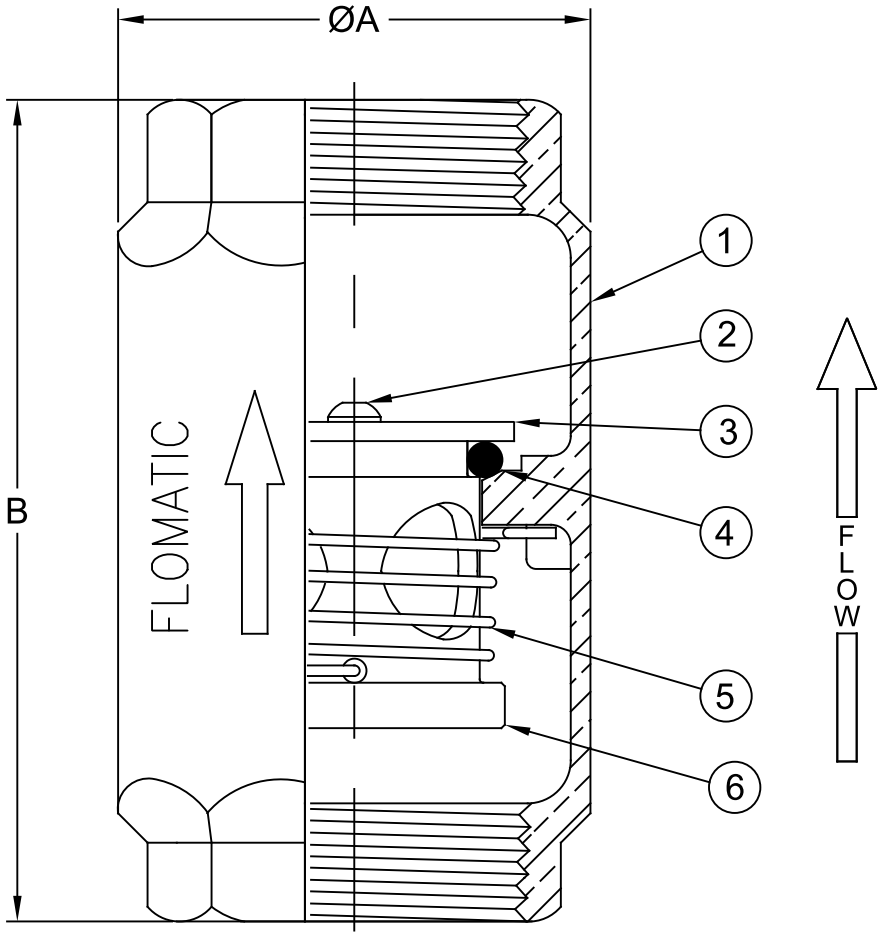

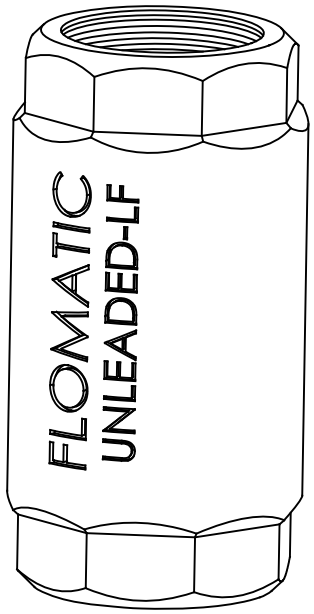

Temp Max: 400°F (204ºC)
Pressure Max: 100 psi (6.8 bar)

Item #	Qty	Description	Material	ASTM
1	1	Body	Unleaded Bronze	C89833
2	1	Screw	Stainless Steel	18-8
3	1	Washer	Stainless Steel	18-8
4	1	O'Ring	Viton	------
5	1	Spring	Stainless Steel	302
6	1	Guide	Stainless Steel	316

Dimensions (FNPT x FNPT)

ANSI B1.20.1

Size		Part #	ØA		B		NPT	Weight	
inch	mm		inch	mm	inch	mm		lbs	kg
3/4	20	4030HTE	1.44	37	2.75	70	3/4	.80	.36

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798