


Ductile Iron Check Valve

Sizes 3" thru 6" / 75mm thru 150mm

Model 82DP **FLOMATIC**[®]

Flomatic Corporation

Materials

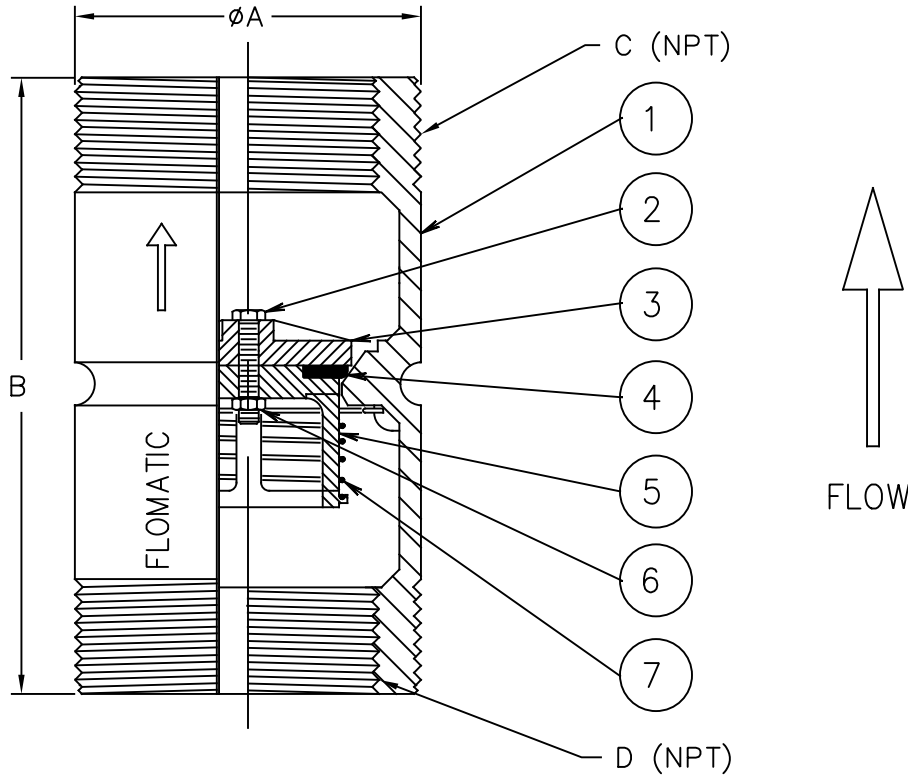

Max Temp 180°F (82°C)
Max Pressure 400psi (24bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Bolt	Stainless Steel	304
3	1	Dome* (Epoxy Coated)	Ductile Iron	65-45-12
4	1	Rubber Disc	Buna-n	N-5007
5	1	Guide (Epoxy Coated)	Ductile Iron	65-45-12
6	1	Nut	Stainless Steel	304
7	1	Spring	Stainless Steel	302

* 4094DP uses a 304 S.S. Flat Washer & Federalloy C89833 Guide
4095DP Bolt is 18-8 S.S.
4097DP Bolt is 316 S.S. & Nut is 18-8 S.S.

Dimensions

Size		Part #	A		B		C		D		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
2-1/2 X 3*	65 X 75	4094DP	3-5/8	92	7-3/16	183	3	76	2-1/2	64	7	3
3 X 4	75 X 100	4095DP	4-5/8	117	8-1/8	206	4	102	3	76	10	5
4 X 5	100 X 125	4096DP	5-3/4	146	10-11/64	258	5	127	4	102	25	11
5 X 6	125 X 150	4097DP	6-3/4	171	13-5/8	346	6	152	5	127	51	23

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2018 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com