

# Ductile Iron Check Valve

# Model 82DP





Flomatic Corporation

Sizes 3" thru 6" / 75mm thru 150mm

LEAD FREE  
NSF/ANSI 61



## Materials

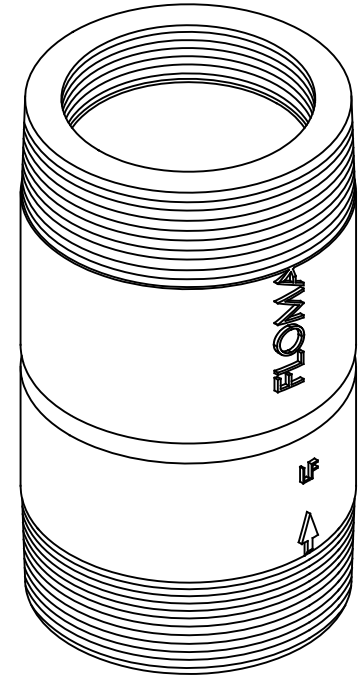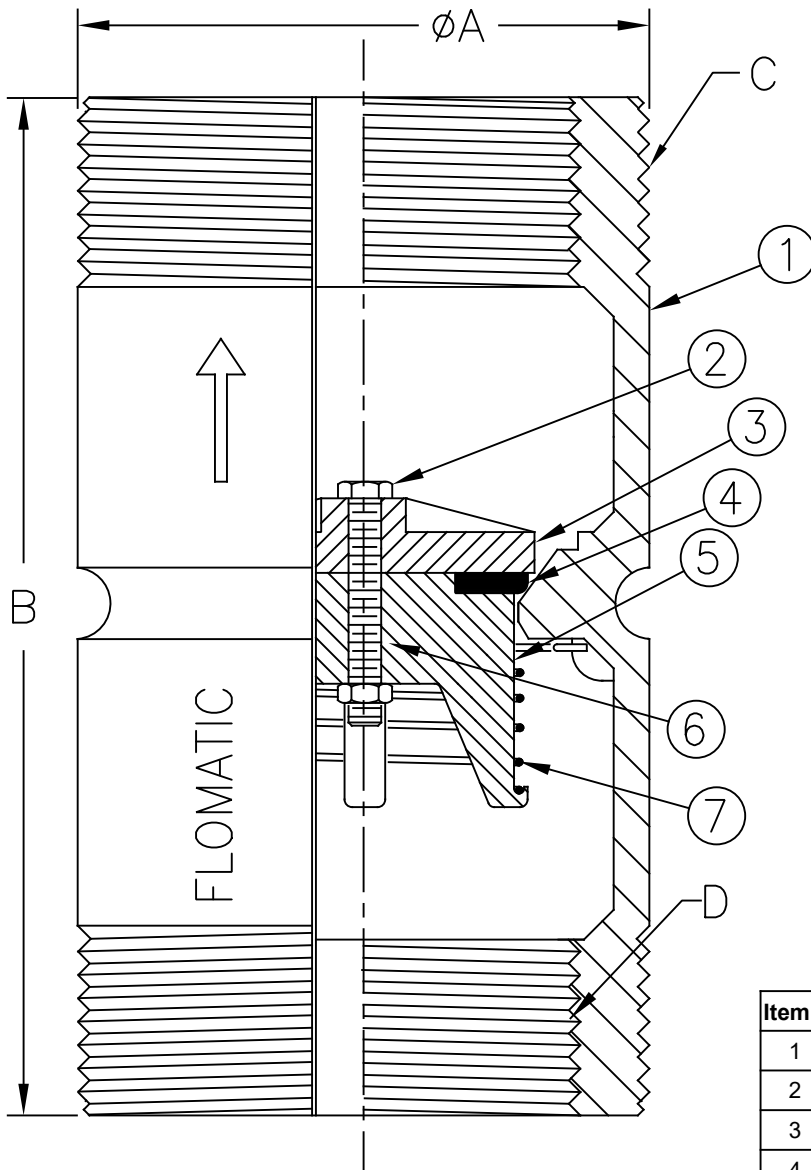

Max Temp 180°F (82°C)  
Max Pressure 400psi (24bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Bolt	Stainless Steel	18-8
3	1	Dome (Epoxy Coated)	Ductile Iron	65-45-12
4	1	Rubber Disc	Buna-n	N-5007
5	1	Guide (Epoxy Coated)	Ductile Iron	65-45-12
6	1	Nut	Stainless Steel	18-8
7	1	Spring	Stainless Steel	302

4094DP uses a 304 SS Flat Washer & Nut w/ Bronze C89833 Guide  
4096DP Bolt & Nut is 304 SS  
4097DP Bolt is 316 SS

## Dimensions (FNPT X FNPT)

ANSI B1.20.1

Size		Part #	A		B		C (MNPT)		D (FNPT)		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
2-1/2 X 3*	65 X 75	4094DP	3-5/8	92	7-3/16	183	3	76	2-1/2	64	6.3	3
3 X 4	75 X 100	4095DP	4-5/8	117	9-41/64	245	4	102	3	76	17	8
4 X 5	100 X 125	4096DP	5-3/4	146	11-17/64	286	5	127	4	102	27	12
5 X 6	125 X 150	4097DP	6-3/4	171	13-5/8	346	6	152	5	127	51	23

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2023 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. [www.flomatic.com](http://www.flomatic.com)



January 13, 1998  
Dwg No: S4093DP Rev: H (8/23)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798