

# Ductile Iron Check Valves

# Headloss Chart


Model 82DP




Flomatic Corporation

Sizes 2" Thru 4" / 50mm Thru 150 mm

LEAD FREE  
NSF/ANSI 61



Headloss charts are not to be used for valve sizing

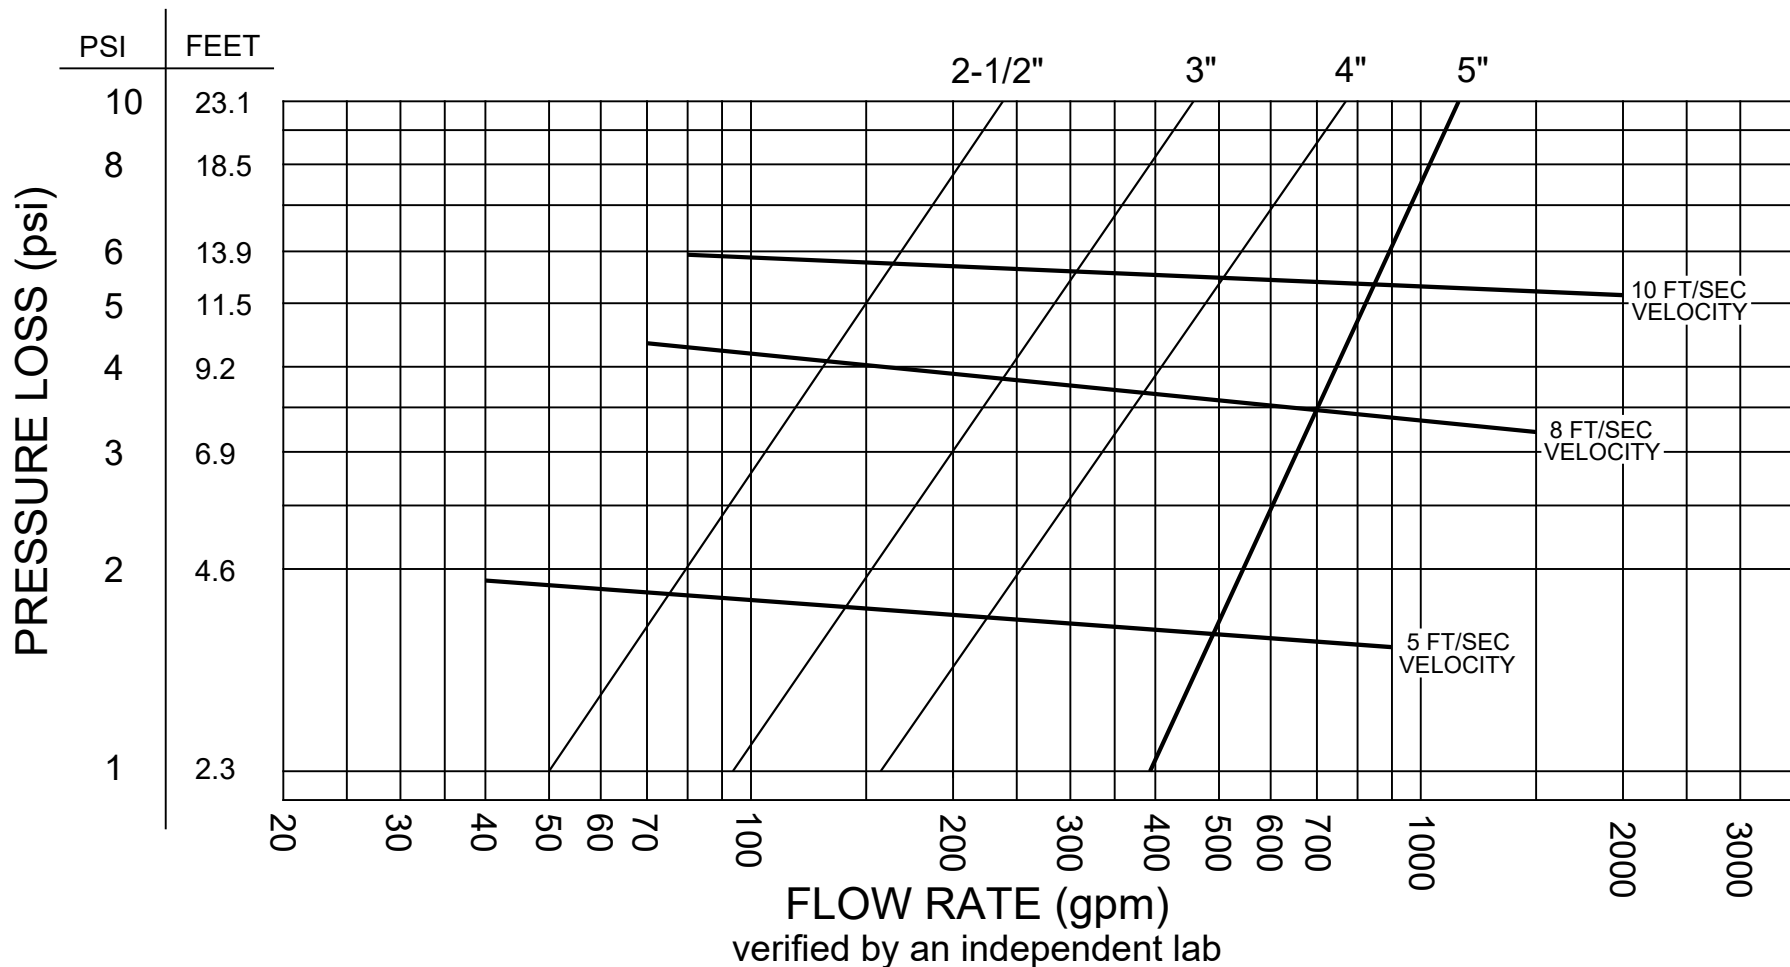

Size	2-1/2"	3"	4"	5"
Cv	11	15	61	21

Note: For longer service life & higher efficiencies it is recommended that flow velocity be between 3 to 10 feet/second

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. [www.flomatic.com](http://www.flomatic.com)

May 30, 1996  
Dwg No: S82HL Rev: H (2/22)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798

