

Ductile Iron Check Valve

Model 80DI




Flomatic Corporation

Sizes 1-1/4" & 1-1/2" / 32 mm & 40 mm



Materials

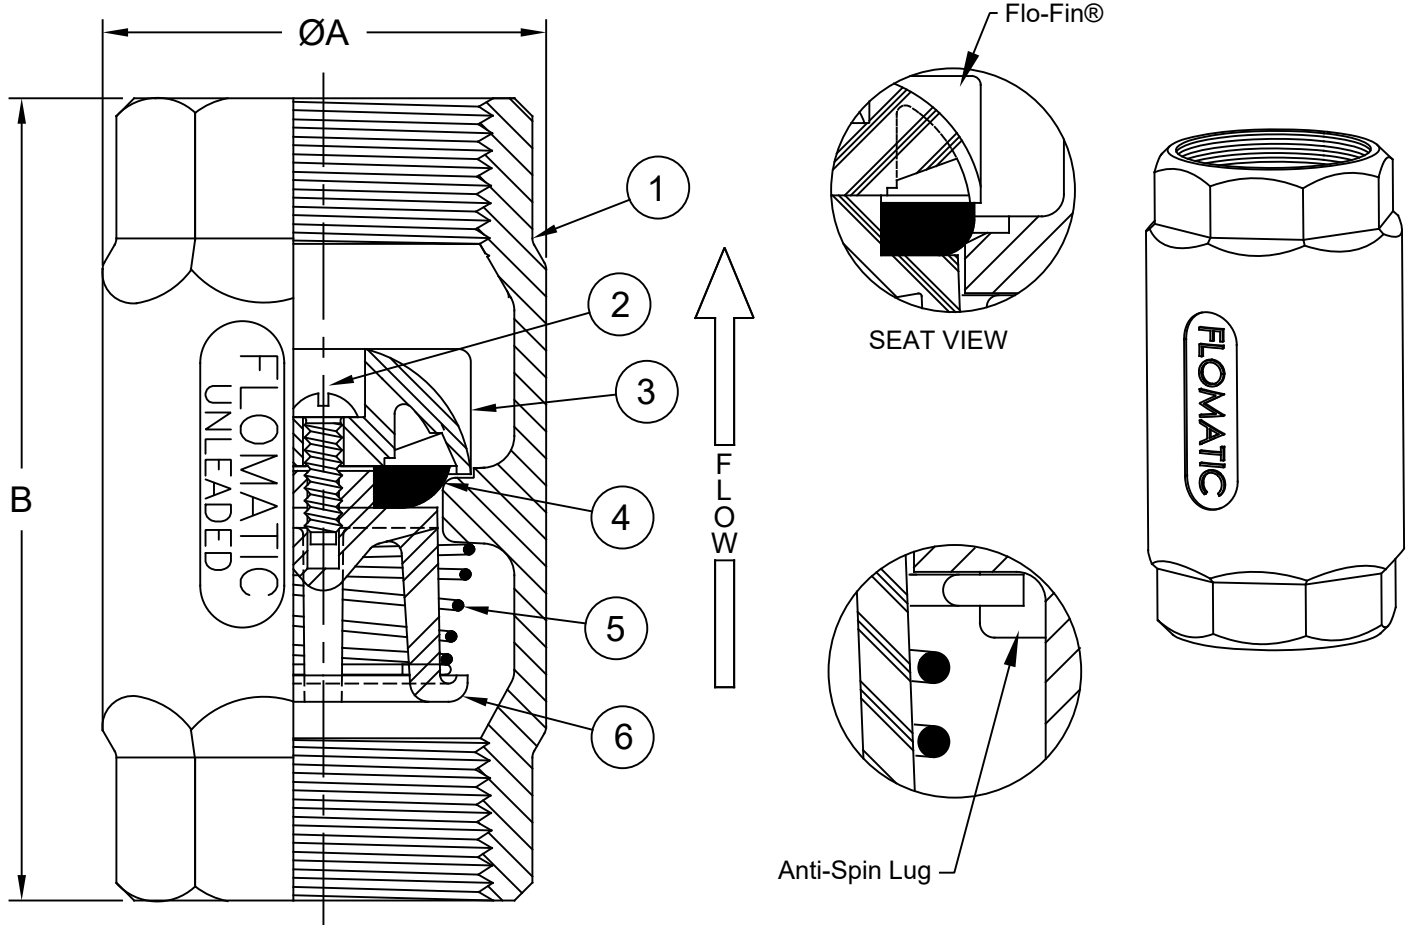

Max Temp 180°F (82°C)
Max Pressure 400psi (28bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Screw	Stainless Steel	302
3	1	Dome*	Delrin®	500P
4	1	Disc	Buna-N	N-5007
5	1	Spring	Stainless Steel	302
6	1	Guide*	Delrin®	500P

*1-1/2" uses Celcon® M90 Guide & Dome & a 304SS / Nylon Nut

Patent #'s 4,971,093 & 6,581,633

Dimensions (FNPT X FNPT)

ANSI B1.20.1

Size		Part #	ØA		B		NPT	Weight	
inch	mm		inch	mm	inch	mm		lbs	kg
1-1/4	32	4032DI	2-3/16	56	4-3/16	106	1-1/4	1.6	.73
1-1/2	40	4033DI	2-21/32	67	4-5/8	117	1-1/2	2.3	1.1

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



January 25, 2005
Dwg No: S4032DI Rev: H (1/24)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798