

# Ductile Iron Check Valve

# Model 80DI




Flomatic Corporation

Sizes 3" thru 8" / 80 mm thru 200 mm

LEAD FREE  
NSF/ANSI 61



## Materials

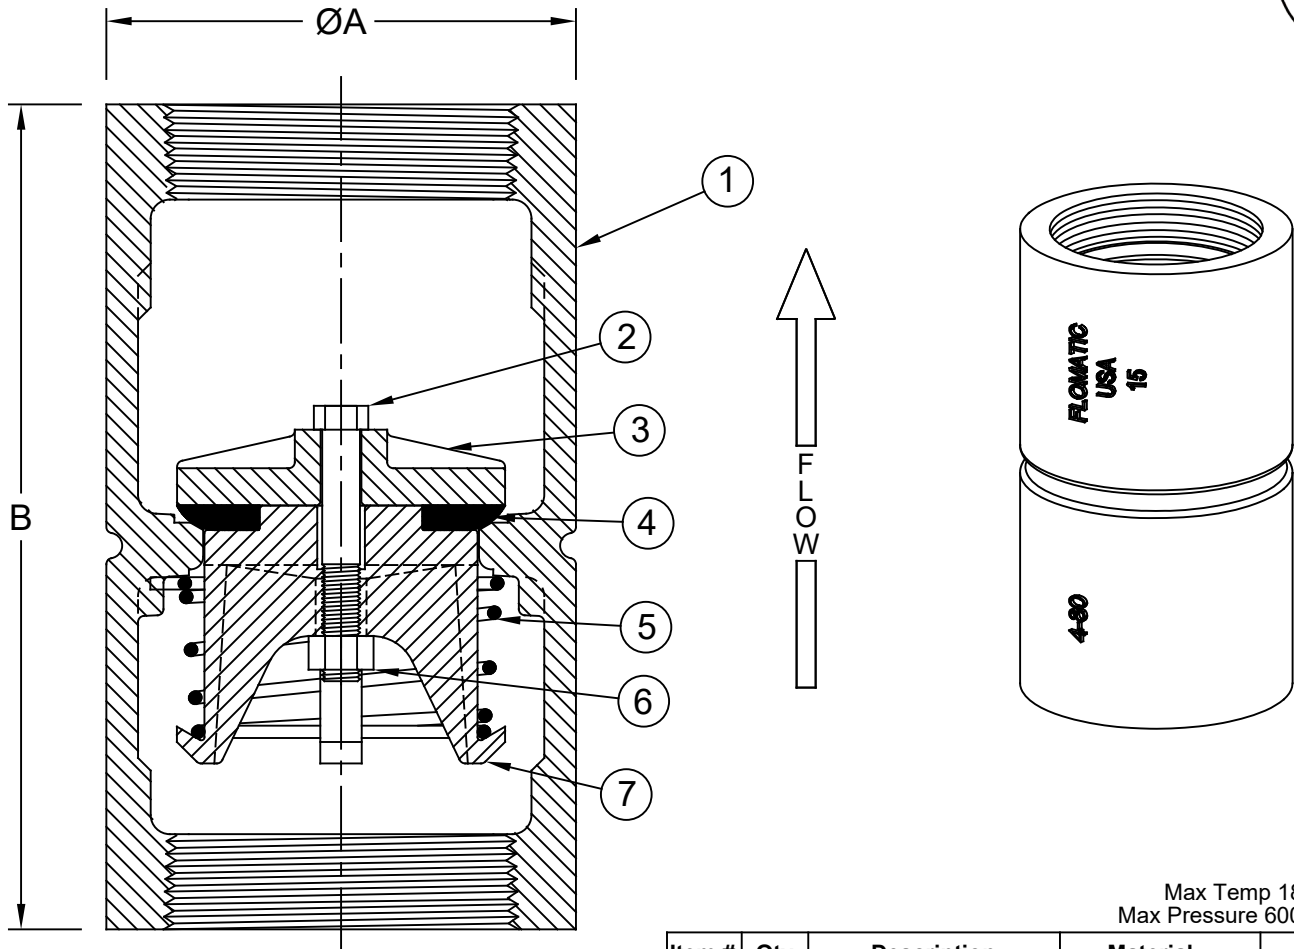

Max Temp 180°F (82°C)  
Max Pressure 600psi (42bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Bolt*	Stainless Steel	304
3	1	Dome (Epoxy Coated)	Ductile Iron	65-45-12
4	1	Disc**	Buna-N	N-5007
5	1	Spring	Stainless Steel	302
6	1	Nut*	Stainless Steel	304
7	1	Guide (Epoxy Coated)	Ductile Iron	65-45-12

\*5" - Bolt is 316SS, Nut is 18-8SS

\*6" & 8" - Bolt & Nut is 18-8SS

\*\*8" - Disc is N-7039

## Dimensions (FNPT x FNPT)

ANSI B1.20.1

Size		Part #	ØA		B		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
3	80	7938	4-5/8	117	9-41/64	245	17	8
4	100	7939	5-3/4	146	11-17/64	286	26	12
5	125	4088	6-3/4	171	13-5/8	346	43	20
6	150	4089	8	203	15-3/32	383	67	30
8	200	4090	9-5/8	244	15-7/8	403	92	42

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. [www.flomatic.com](http://www.flomatic.com)



January 25, 2005  
Dwg No: S80DI3-8 Rev: J (1/24)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798