

Ductile Iron Check Valve


Model 80DIX



Flomatic Corporation

Sizes 3" thru 8" / 80 mm thru 200 mm

Materials

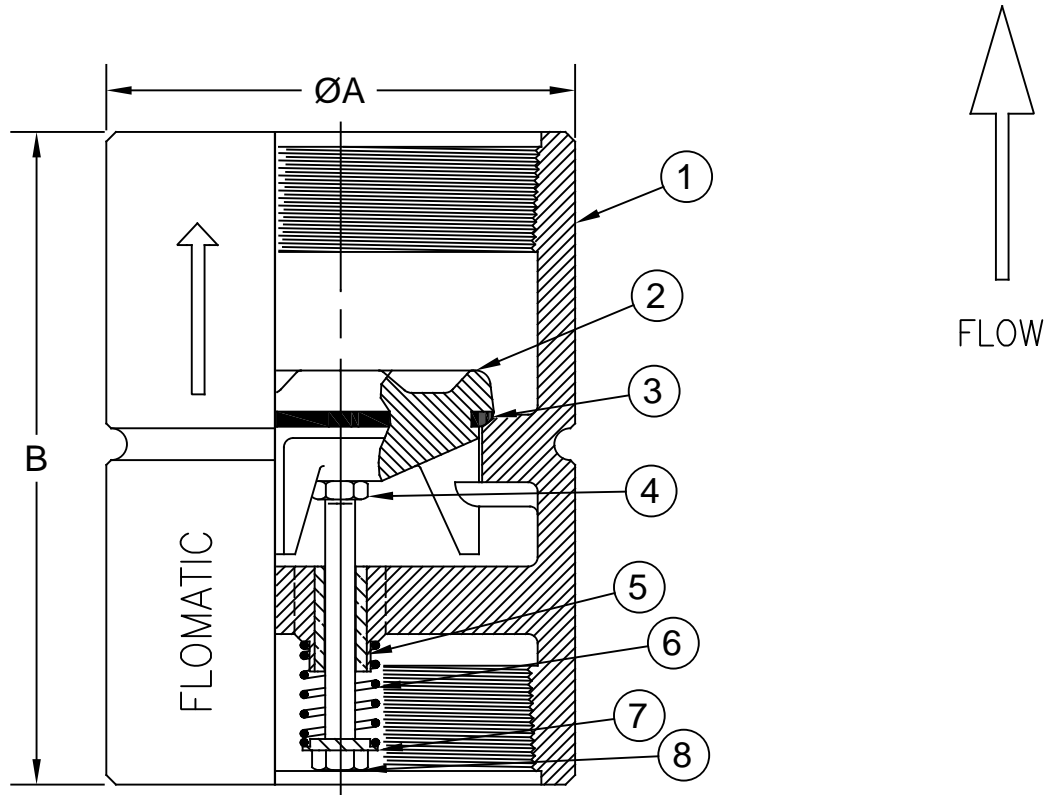

DOUBLE GUIDED POPPET SUITABLE FOR VERTICAL & HORIZONTAL INSTALLATIONS

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	A536
2	1	Poppet (Epoxy Coated)	Ductile Iron	A536
3	1	Rubber Disc	Buna-n	-----
4	1	Nut	Stainless Steel	18-8
5	1	Bushing	Bronze	B271
6	1	Spring	Stainless Steel	18-8
7	1	Spring Retainer	Bronze	B271
8	1	Bolt	Stainless Steel	18-8

*3" HAS NO NUT

Max Temp 180°F (82°C)

Max Pressure 400psi (28bar)

Dimensions

Size		Part #	A		B		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
3*	80	7938DIX	4-15/32	114	8	203	12.5	6
4	100	7939DIX	5-11/32	136	9-55/64	250	20.5	9
6	150	4089DIX	7-3/4	197	11-5/64	281	51	23
8	200	4090DIX	9-11/16	246	15-7/8	403	88.5	40

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2016 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



January 25, 2005
Dwg No: S80dix Rev: E (12/16)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798