

Ductile Iron Check Valve

Model 80DIX




Fromatic Corporation

Sizes 12" / 300 mm

THIS VALVE IS DESIGNED FOR VERTICAL INSTALLATIONS ONLY

Materials

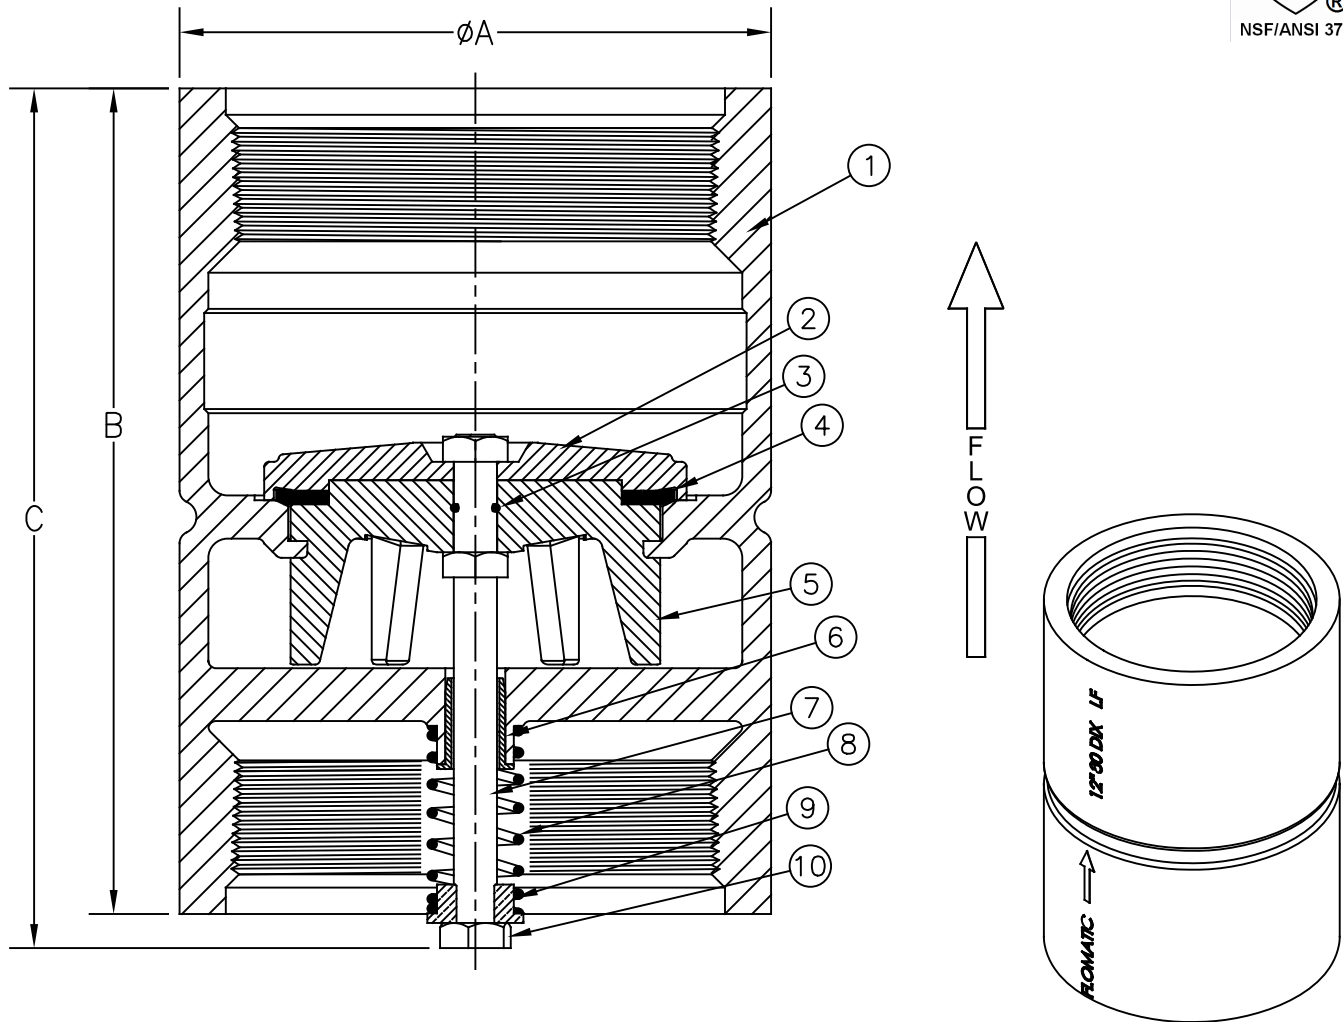

Max Temp 180°F (82°C)
Max Pressure 400psi (28bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	A536	6	1	Bushing	Bronze	B584
2	1	Dome (Epoxy Coated)	Ductile Iron	A536	7	1	Stem	Stainless Steel	304
3	1	O'Ring	Buna-n	N6000AA	8	1	Spring	Stainless Steel	302
4	1	Rubber Disc	Buna-n	-----	9	1	Spring Retainer	Bronze	B140
5	1	Guide (Epoxy Coated)	Ductile Iron	A536	10	3	Nut	Stainless Steel	18-8

Dimensions (FNPT x FNPT)

ANSI B1.20.1

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
12	300	4092DIX	15-13/32	391	21-1/2	546	22-13/32	569	300	136

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2023 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited. www.fromatic.com



December 5, 2005
Dwg No: S4092DIX Rev: E (2/23)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798