

Ductile Iron Check Valve


Sizes 12" / 300 mm

Model 80DIX



Fromatic Corporation

Materials

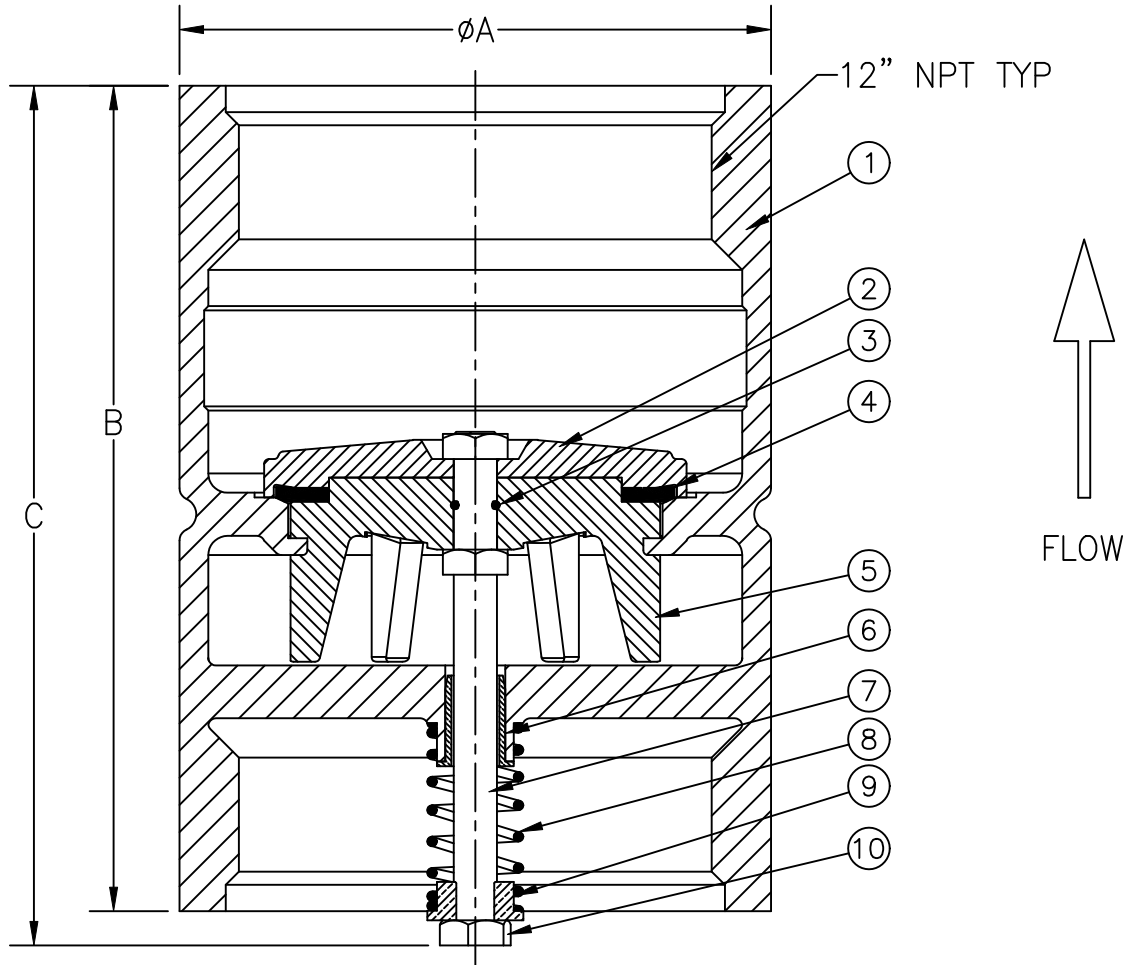

THIS VALVE IS DESIGNED FOR VERTICAL INSTALLATIONS ONLY

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	A536	6	1	Bushing	Bronze	B584
2	1	Dome (Epoxy Coated)	Ductile Iron	A536	7	1	Stem	Stainless Steel	304
3	1	O'Ring	Buna-n	---	8	1	Spring	Stainless Steel	302
4	1	Rubber Disc	Buna-n	---	9	1	Spring Retainer	Bronze	B140
5	1	Guide (Epoxy Coated)	Ductile Iron	A536	10	3	Nut	Stainless Steel	18-8

Dimensions

Max Temp 180°F (82°C)
Max Pressure 175psi (12bar)

Size		Part #	A		B		C		Weight	
Inch	mm		Inch	mm	Inch	mm	Inch	mm	lbs	kg
12	300	4092DIX	15-13/32	391	21-1/2	546	22-13/32	569	340	154

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited.



December 5, 2005
Dwg No: S12_80dix Rev: C (6/13)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798