

Ductile Iron Check Valve


Headloss Chart

Model 80DI **FLOMATIC**[®]


Sizes 1" thru 1-1/2" / 25 mm thru 40 mm

Flomatic Corporation

LEAD FREE
NSF/ANSI 61



Headloss charts are not to be used for valve sizing

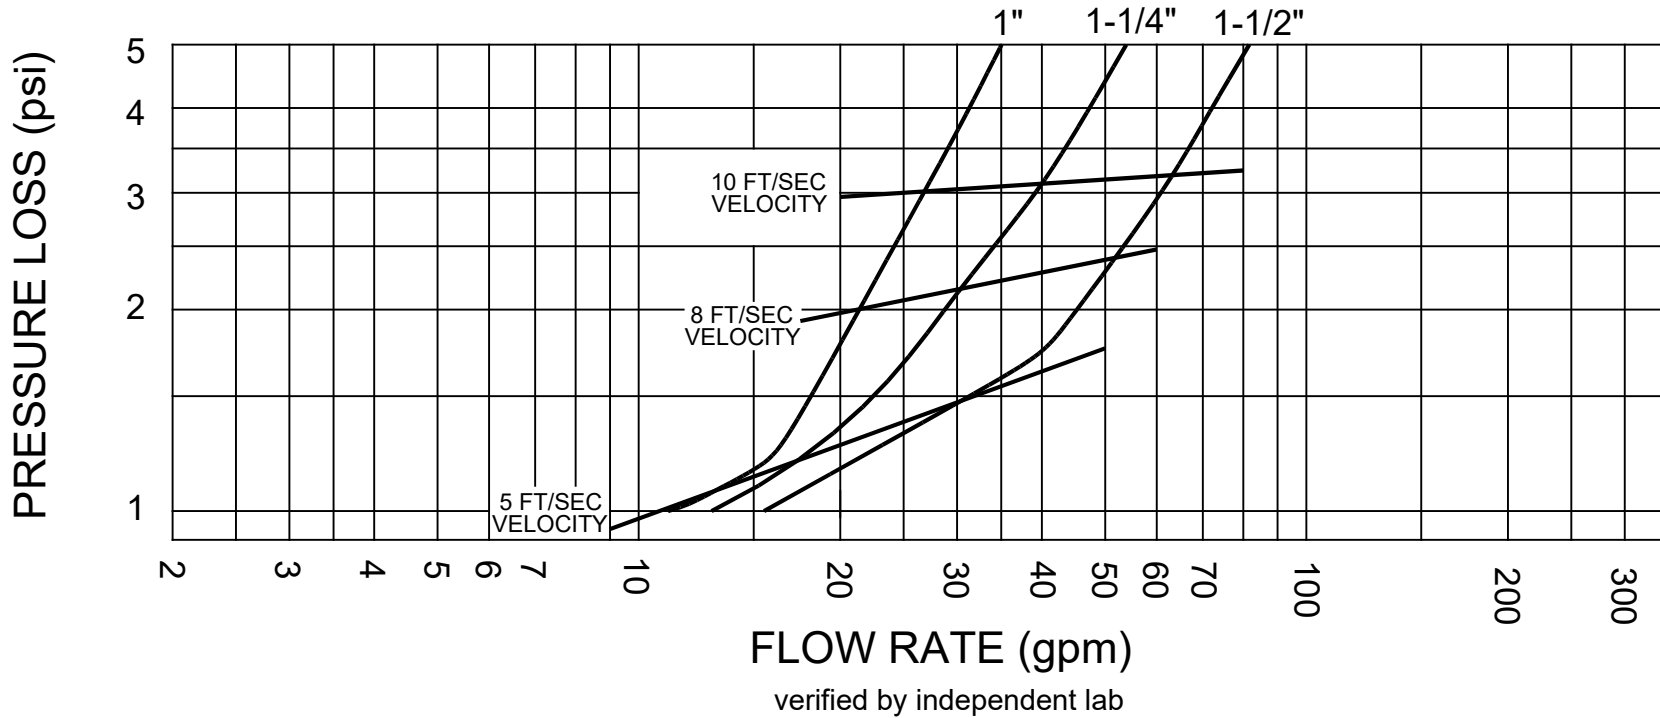

Size	1"	1-1/4"	1-1/2"
Cv	10	13	17

Note: For longer service life & higher efficiencies it is recommended that flow velocity be between 3 to 10 feet/second

Patent # 4,971,093 & 6,581,633

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

August 11, 1995
Dwg No: S80DIHL2 Rev: G (2/22)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798

