

Ductile Iron Check Valve




Model 80MDIS-VFD




Sizes 2" / 50mm

Flomatic Corporation

Materials

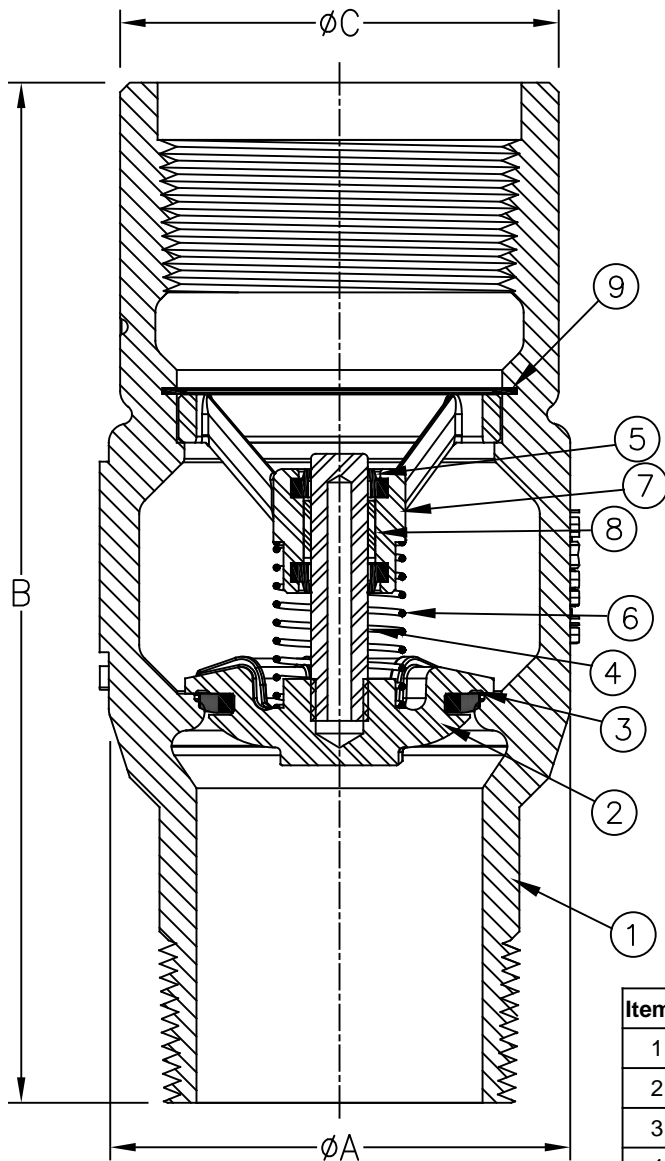

FLOW

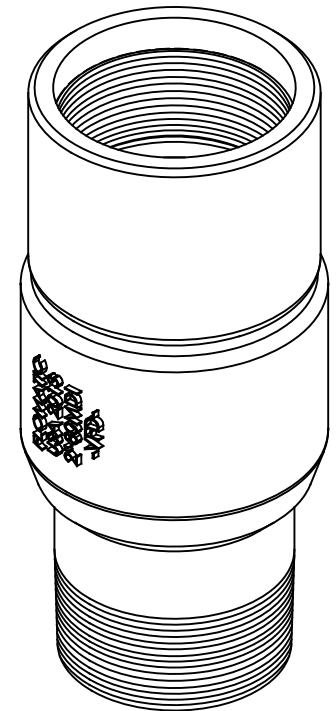

Max Temp 180°F (82°C)
Max Pressure 600psi (42bar)

Item #	Qty	Description	Material	ASTM
1	1	Body	Ductile Iron	65-45-12
2	1	Poppet	Stainless Steel	316
3	1	Seat Disc	Buna-N	N-5007
4	1	Stem	Stainless Steel	316
5	2	Wiper	Engineered Composite	Molythane
6	1	Spring	Stainless Steel	302
7	1	Stem Guide	Stainless Steel	316
8	1	Bushing	Engineered Composite	-----
9	1	Retaining Ring	Stainless Steel	302

Dimensions (MALE NPT X FEMALE NPT)

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
2	50	4084SVFD	3	76	6-11/16	170	2-7/8	73	4	1.8

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2017 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



May 4, 2016
Dwg No: S4084SVFD Rev: A (6/17)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798