

# Ductile Iron Check Valve




# Model 100MDI-VFD



Flomatic Corporation

Sizes 1-1/4" M & 1" F / 32mm x 25mm  
 1-1/4" M & 1-1/4" F / 32mm x 32mm

## Materials

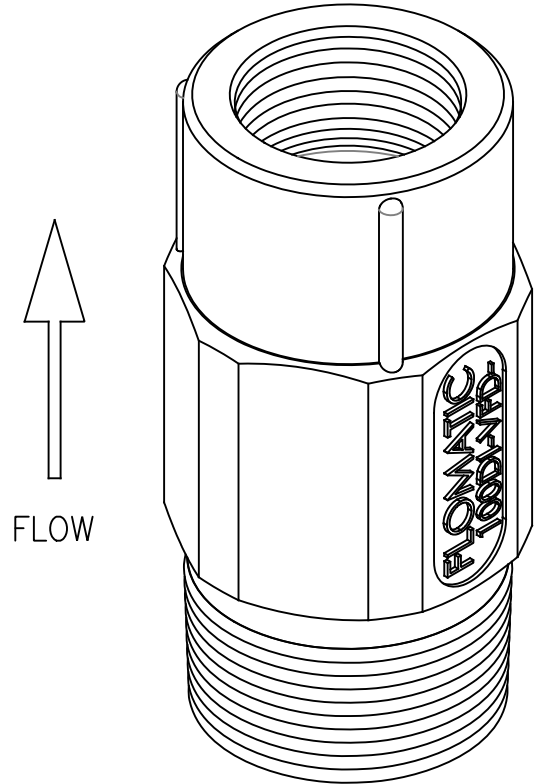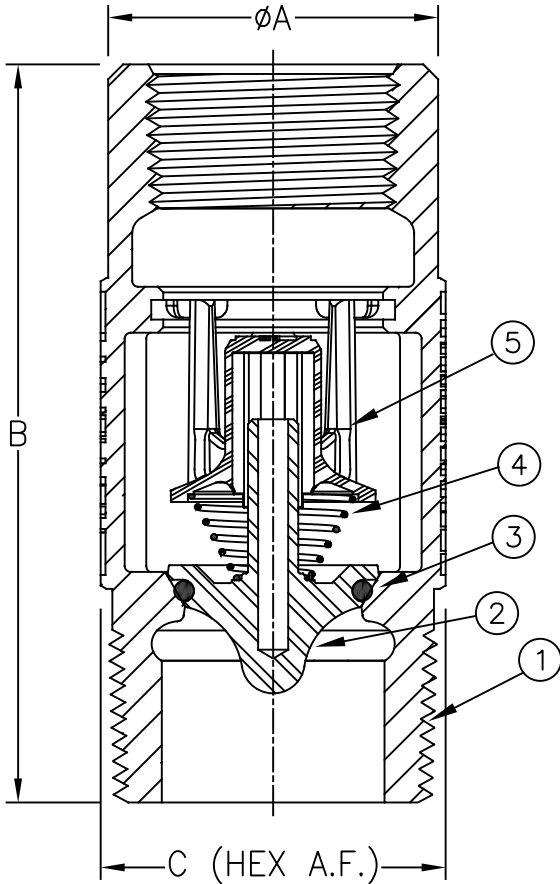

Max Temp 180°F (82°C)  
 Max Pressure 600psi (42bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	A536 65-45-12
2	1	Poppet	Stainless Steel	304
3	1	O'Ring	Buna-N	-----
4	1	Spring	Stainless Steel	302
5	1	Guide	Delrin	100 Black

## Dimensions (MNPT inlet X FNPT outlet)

Size		Part #	A		B		C		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
1-1/4" M X 1" F	32mm x 25mm	4221DIVFD	1-23/32	44	3-27/32	98	1-29/32	48	1.41	.64
1-1/4" M x 1-1/4" F	32mm x 32mm	4223DIVFD	2	51	4-19/64	109	2-1/4	57	1.65	.75

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2018 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



April 26, 2017  
 Dwg No: S4221MDIVFD Rev: A (1/18)

FLOMATIC CORPORATION  
 GLENS FALLS, N.Y. 12801  
 PHONE (518) 761-9797  
 FAX (518) 761-9798