

Ductile Iron Check Valve



Model 80DI-VFD

FLOMATIC®

Sizes 6" thru 10" / 150 mm Thru 250 mm

Flomatic Corporation

Materials

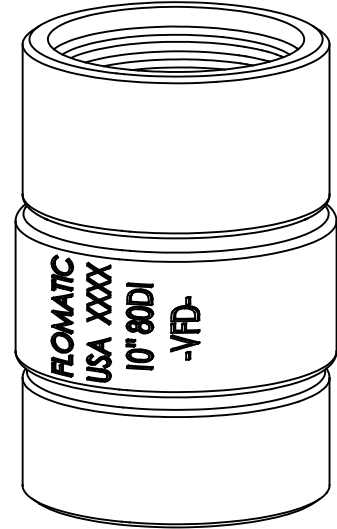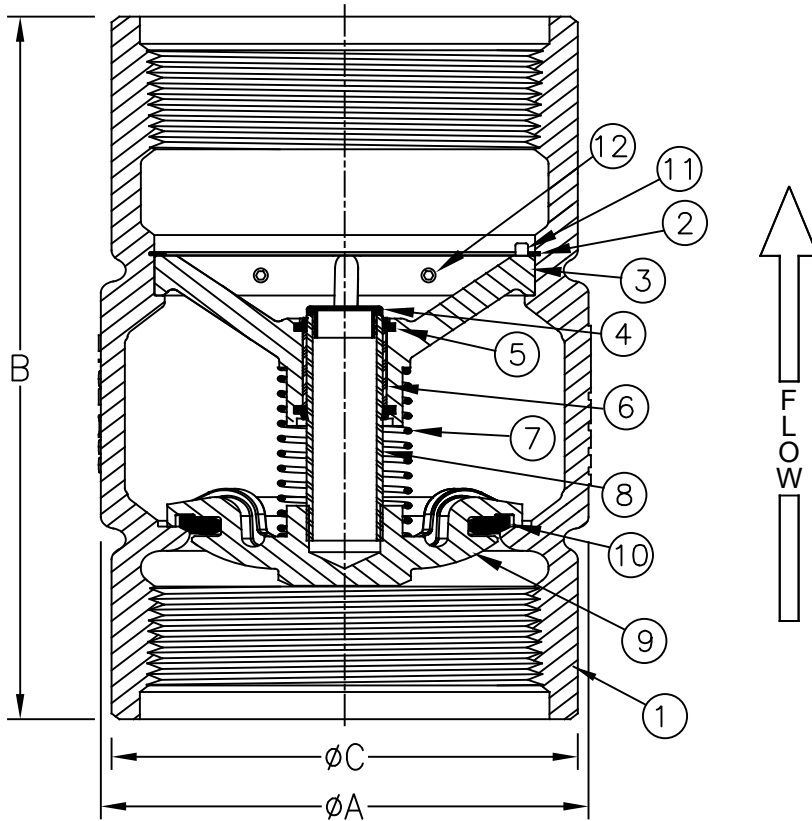

Max Temp 180°F (82°C)
Max Pressure 600psi (42bar)

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Retaining Ring	Stainless Steel	302
3	1	Stem Guide	Ductile Iron	65-45-12
4	1	Stem Cap (Epoxy Coated)	Engineered Composite	Polyethelyne
5	2	Wiper	Engineered Composite	Molythane
6	1	Bushing	Engineered Composite	-----
7	1	Spring	Stainless Steel	302
8	1	Stem	Stainless Steel	316
9	1	Disc	Buna-N	N-5007*
10	1	Poppet (Epoxy Coated)	Ductile Iron	65-45-12
11	1	SHCS	Stainless Steel	316
12	4	SHSS	Stainless Steel	316

Dimensions (FNPT x FNPT)

8" & 10" use N-6010
Patent # 9,032,992

ANSI B1.20.1

Optional Female 8 Round Threads
API Specification 5B
Line Pipe Threads are not API certified

Size		Part #	ØA		B		ØC		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg
6	150	4089VFD	8	203	15-6/64	385	7-21/32	194	58	26
8	200	4090VFD	9-11/16	246	15-27/32	402	9-11/16	246	84	38
10	250	4091VFD	12-1/8	308	17-1/2	435	12-1/8	308	142	65

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC® VALVES

April 4, 2018
Dwg No: S4091VFD Rev: B (1/24)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798