## **Stainless Steel Check Valve**


# **Model 812XT**



Sizes 1/2" thru 2-1/2" / 15mm thru 65mm

## **Flomatic Corporation**

#### **Materials**

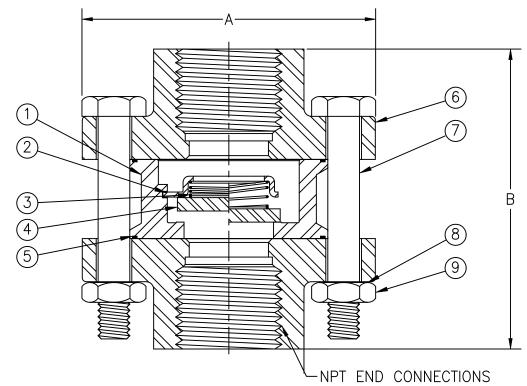





Max Temp 180°F (82°C) Max Pressure 600psi (41bar)

Item #	Qty	Description	Material	ASTM				
1	1	Body	Stainless Steel	316				
2	1	Spring Retainer	Stainless Steel	316				
3	1	Spring	Stainless Steel	316				
4	1	Disc	Stainless Steel	316				
5	2	Seal	PTFE					
6	2	Flange	Stainless Steel	316				
7	A/R	Hex Head Bolt	Stainless Steel	316				
8	A/R	Washer	Stainless Steel	316				
9	A/R	Hex Head Nut	Stainless Steel	316				
CONNECTIONS - MODEL 812YS								

**FLOW** 

## **Dimensions**

ALSO AVAILABLE WITH SOCKET WELD END CONNECTIONS - MODEL 812XS

Size		D 4.44	A		В		Weight	
inch	mm	Part #	inch	mm	inch	mm	lbs	kg
1/2	15	2420XT	2.26	57	2.62	67	.9	.41
3/4	20	2421XT	2.64	67	2.82	72	1.5	.68
1	25	2422XT	2.94	75	3.17	81	2.1	.95
1-1/4	32	2423XT	3.60	91	3.82	97	3.5	1.59
1-1/2	40	2424XT	4.04	103	4	102	5.3	2.40
2	50	2425XT	4.98	126	4.62	117	7.5	3.40
2-1/2	65	2426XT	6.11	155	4.80	122	19	8.62

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawingsor information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.

