Stainless Steel Check Valve Model 812XT

Sizes 3" & 4" / 75mm & 100mm

FLOMATIC®
Flomatic Corporation

LOW-LEAD
IAPMO R&T ®
NSF/ANSI 372

Materials

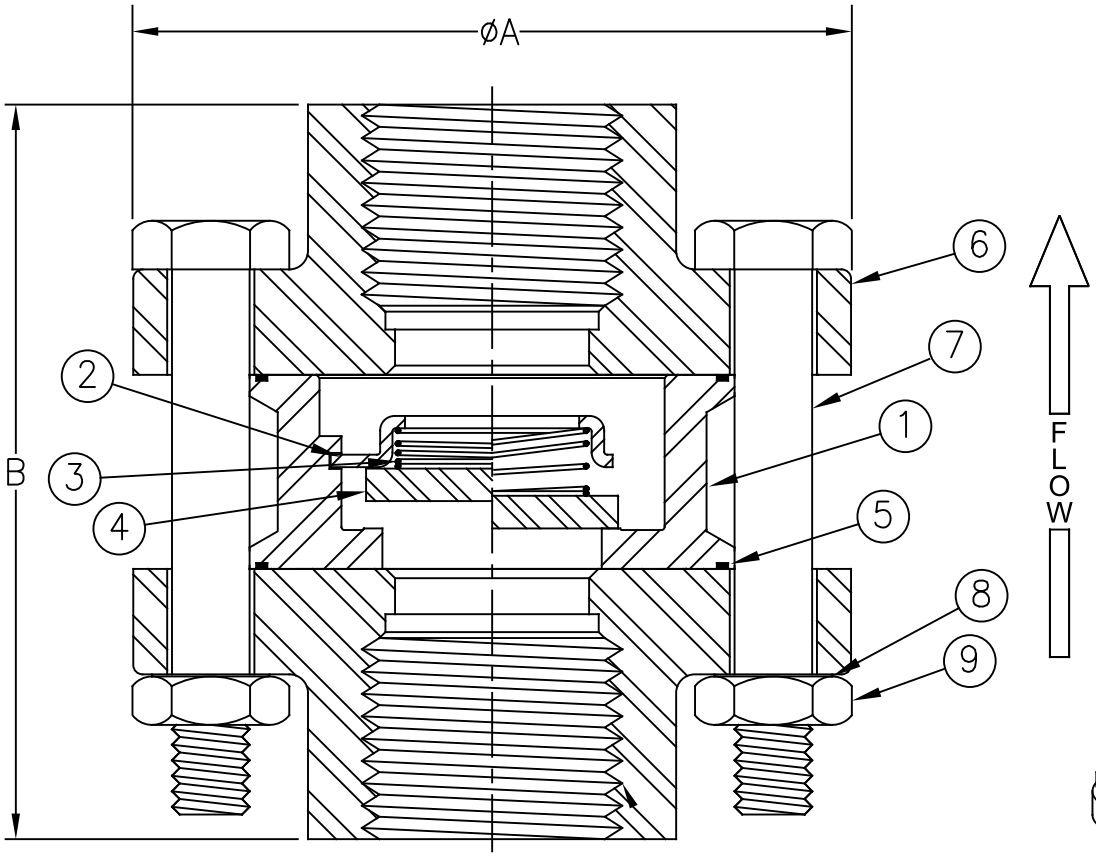

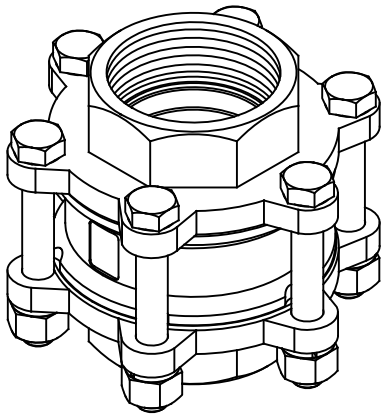

Max Temp 400°F (200°C)
Max Pressure 300psi (21bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Stainless Steel	316	6	2	Flange	Stainless Steel	316
2	1	Spring Retainer	Stainless Steel	316	7	A/R	Hex Head Bolt	Stainless Steel	316
3	1	Spring	Stainless Steel	316	8	A/R	Washer	Stainless Steel	316
4	1	Disc	Stainless Steel	316	9	A/R	Hex Head Nut	Stainless Steel	316
5	2	Seal	PTFE	--------					

Dimensions (FNPT x FNPT)

ALSO AVAILABLE WITH SOCKET WELD END CONNECTIONS - MODEL 812XS

ANSI B1.20.1

Size		Part #	ØA		B		Inlet NPT	Outlet NPT	Weight	
inch	mm		inch	mm	inch	mm			lbs	kg
3	75	2427XT	7.75	197	6.13	156	3	3	24	10.9
4	100	2428XT	8.81	224	7.25	184	4	4	38	17.2

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798