## **Stainless Steel Check Valve**

**Model 812XT** 


**FLMATIC** 

Sizes 6" thru 8" / 150mm thru 200mm

## **Flomatic Corporation**

## **Materials**



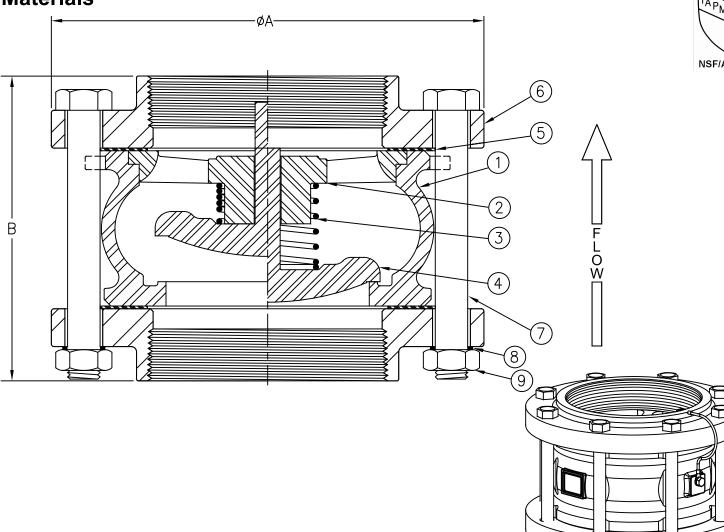

Max Temp 400°F (200°C) Max Pressure 300psi (21bar)

Item #	Qty	Description	Material	ASTM	ltem #	Qty	Description	Material	ASTM
1	1	Body	Stainless Steel	316	6	2	Flange	Stainless Steel	316
2	1	Spring Retainer	Stainless Steel	316	7	A/R	Hex Head Bolt	Stainless Steel	316
3	1	Spring	Stainless Steel	316	8	A/R	Washer	Stainless Steel	316
4	1	Disc	Stainless Steel	316	9	A/R	Hex Head Nut	Stainless Steel	316
5	2	Seal	PTFE						

## **Dimensions (FNPT x FNPT)**

ALSO AVAILABLE WITH SOCKET WELD END CONNECTIONS - MODEL 812XS

**ANSI B1.20.1** 

s	ize	5 . "	ØA		В		Inlet	Outlet	Weight	
inch	mm	Part #	inch	mm	inch	mm	NPT	NPT	lbs	kg
6	150	2430XT	11	279	7.56	192	6	6	77	34.9
8	200	2431XT	13.5	343	9.50	241	8	8	136	61.7

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written

