Stainless Steel Check Valve

Model 812XT


FL3MATIC®

Sizes 6" thru 8" / 150mm thru 200mm

Materials



LOW-LEAD

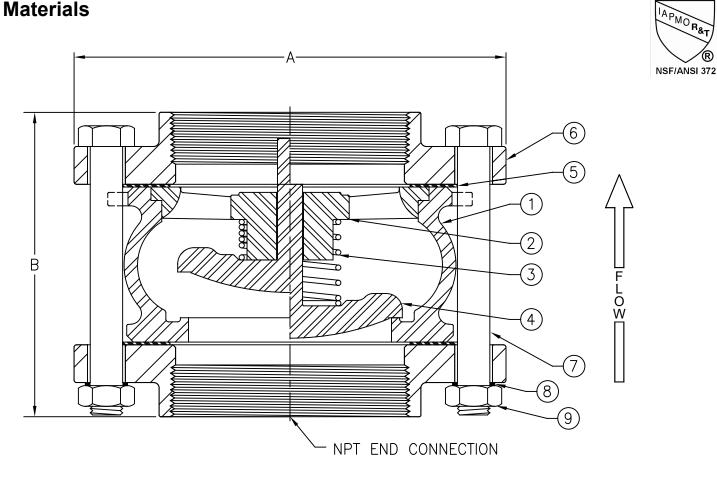

Item #	Qty	Description	Material	ASTM	
1	1	Body	Stainless Steel	316	
2	1	Spring Retainer	Stainless Steel	316	
3	1	Spring	Stainless Steel	316	
4	1	Disc	Stainless Steel	316	
5	2	Flange Seal	Vellumoid		
6	2	Flange	Stainless Steel	316	
7	A/R	Hex Head Bolt	Stainless Steel	316	
8	A/R	Hex Washer	Stainless Steel	316	
9	A/R	Hex Head Nut	Stainless Steel	316	

Dimensions (FNPT)

ANSI B1.20.1 ALSO AVAILABLE WITH SOCKET WELD END CONNECTIONS - MODEL 812XS

S	ize	Part #	Α		В		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
6	150	2430XT	11	279	7.56	192	77	34.9
8	200	2431XT	13.5	343	9.50	241	136	61.7

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



Max Temp 180°F (82°C)

Max Pressure 600psi (41bar)