

Stainless Steel Check Valve


Model 80S6



Flomatic Corporation

Sizes 1" / 25mm

Materials

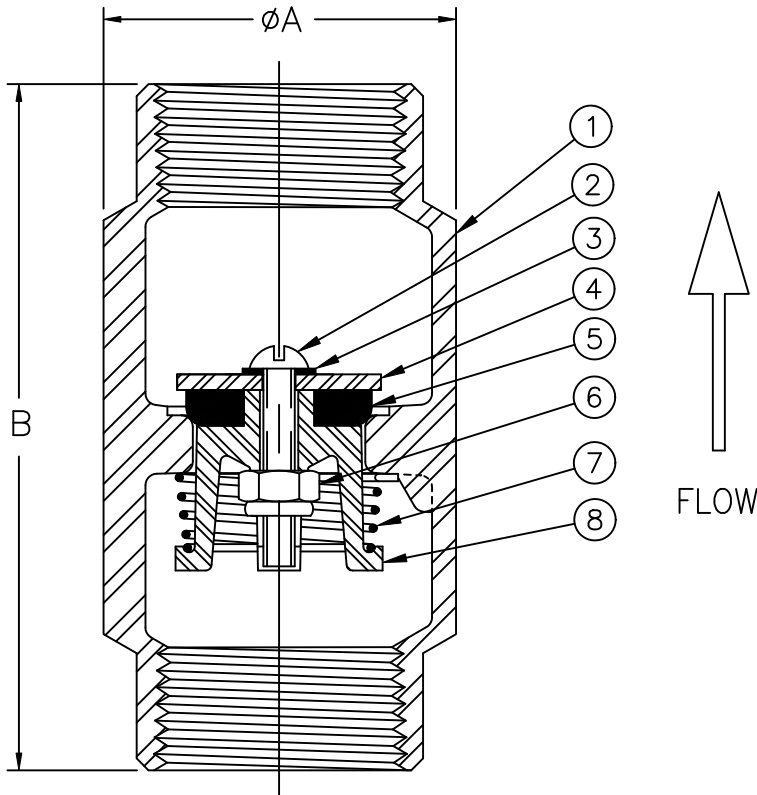

Max Temp 400°F (200°C)
Max Pressure 400psi (28bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Stainless Steel	316	5	1	Disc	Viton	-----
2	1	Screw	Stainless Steel	316	6	1	Nut	SS/Nylon	316/N200SL
3	1	Washer	Nylon (Zytel 42A)	NCO10	7	1	Spring	Stainless Steel	316
4	1	Washer	Stainless Steel	316	8	1	Guide	Stainless Steel	316

Dimensions (FNPT x FNPT)

Size		Part #	A		B		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
1	25	4031S6	1-7/8	48	3-9/16	90	1.1	.50

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2016 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



June 2, 1998
Dwg No: S4031S6 Rev: F (8/16)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798