

Stainless Steel Check Valve

Model 80S6




Fromatic Corporation

Sizes 1-1/4" & 1-1/2" / 32mm & 40mm

LEAD FREE
NSF/ANSI 61



Materials

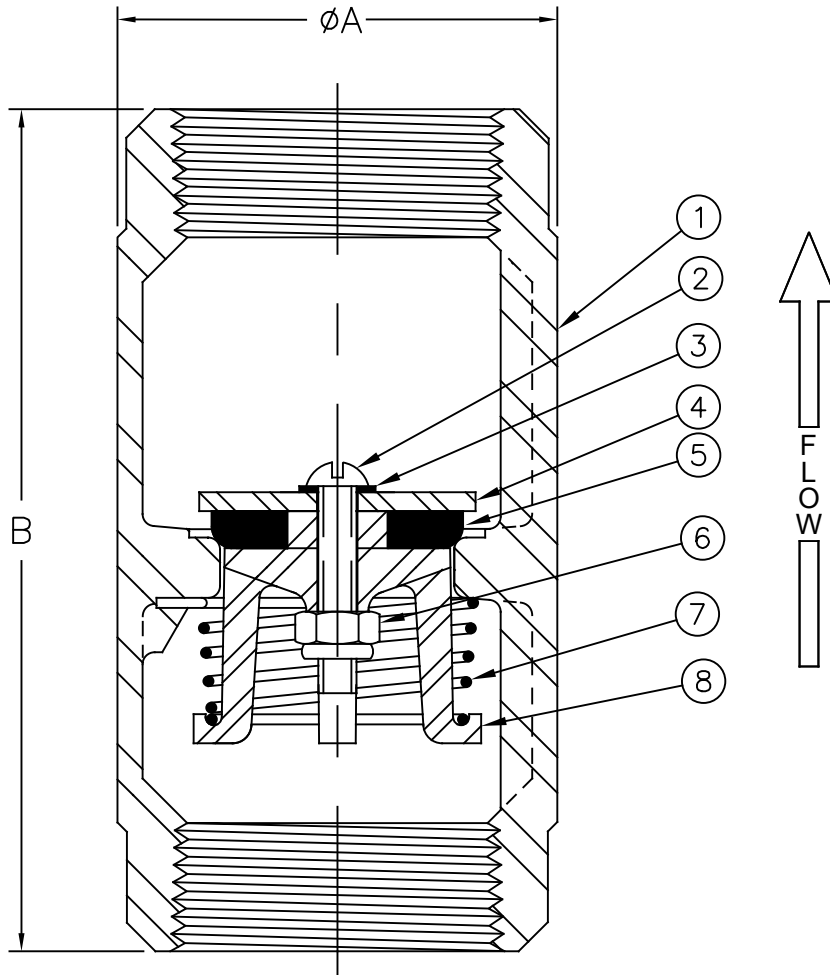

Max Temp 400°F (200°C)
Max Pressure 450psi (31bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Stainless Steel	316	5	1	Disc	Viton	-----
2	1	Screw	Stainless Steel	316	6	1	Nut	SS/Nylon	316/N200SL
3	1	Washer	Nylon (Zytel 42A)	NCO10	7	1	Spring	Stainless Steel	316
4	1	Washer	Stainless Steel	316	8	1	Guide	Stainless Steel	316

Dimensions (FNPT x FNPT)

ANSI B1.20.1

Size		Part #	A		B		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
1-1/4	32	4032S6	2-3/16	56	4-3/16	106	1.4	.63
1-1/2	40	4033S6	2-5/8	67	4-5/8	117	2.7	1.2

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2024 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited.



June 2, 1998
Dwg No: S4032-3S6 Rev:G (1/24)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798