


Stainless Steel Check Valve

Sizes 2" / 50mm


Model 80S6 **FLOMATIC®**

Flomatic Corporation

LEAD FREE
NSF/ANSI 61



Materials

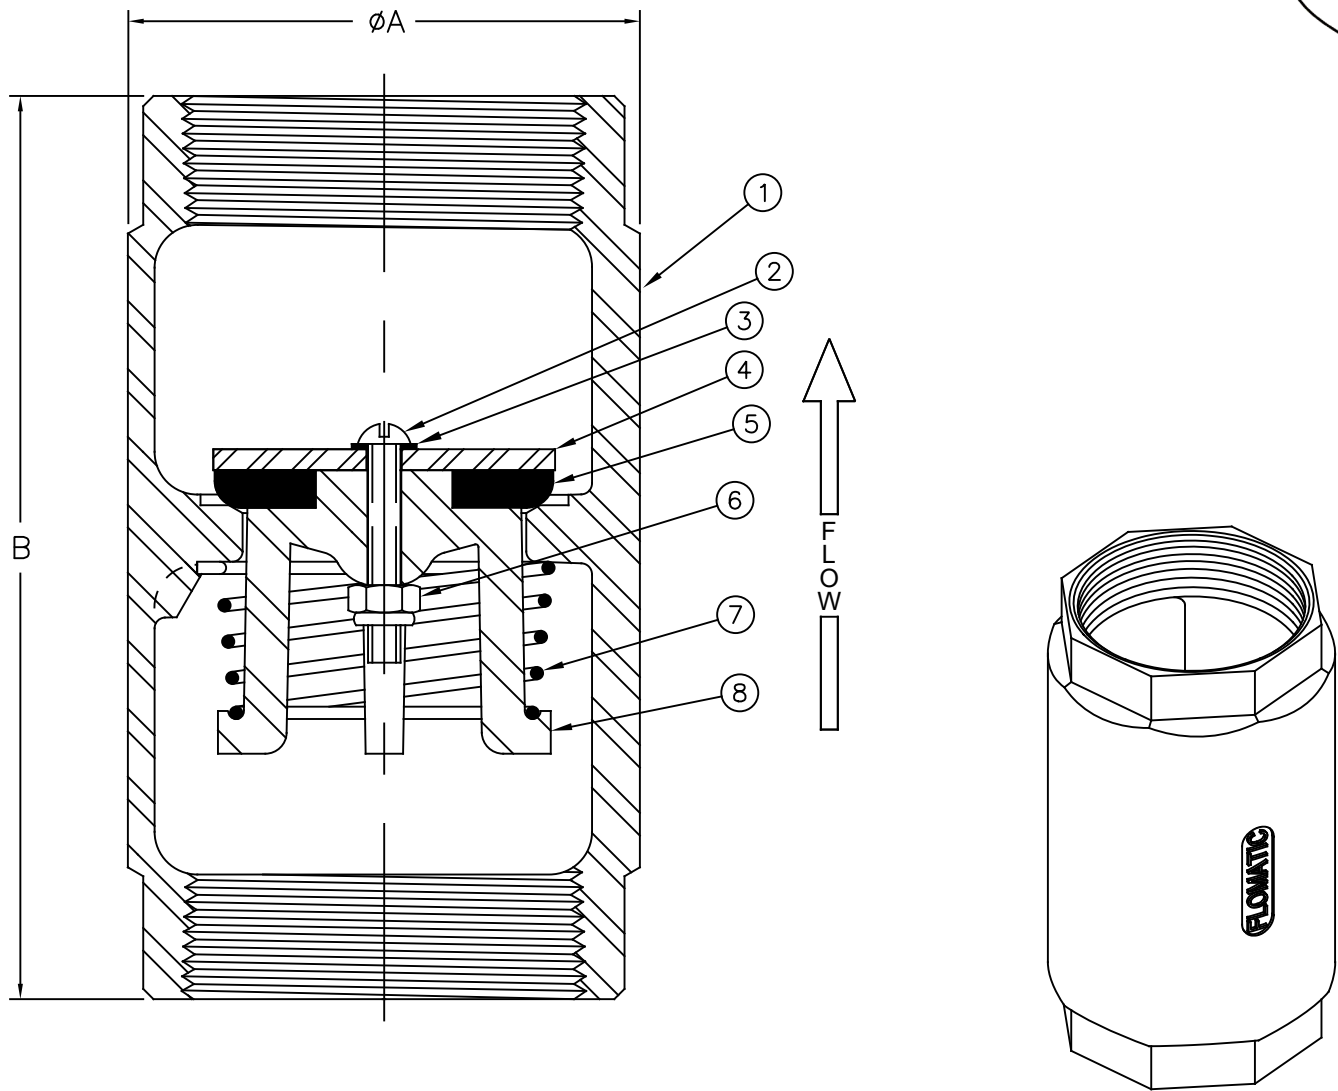

Max Temp 400°F (200°C)
Max Pressure 450psi (31bar)

| Item # | Qty | Description | Material | ASTM | Item # | Qty | Description | Material | ASTM |
|--------|-----|-------------|-------------------|-------|--------|-----|-------------|-----------------|------------|
| 1 | 1 | Body | Stainless Steel | 316 | 5 | 1 | Disc | Viton | ----- |
| 2 | 1 | Screw | Stainless Steel | 316 | 6 | 1 | Nut | SS/Nylon | 316/N200SL |
| 3 | 1 | Washer | Nylon (Zytel 42A) | NCO10 | 7 | 1 | Spring | Stainless Steel | 316 |
| 4 | 1 | Washer | Stainless Steel | 316 | 8 | 1 | Guide | Stainless Steel | 316 |

Dimensions (FNPT x FNPT)

ANSI B1.20.1

| Size | | Part # | A | | B | | Weight | |
|------|----|--------|------|----|--------|-----|--------|-----|
| inch | mm | | inch | mm | inch | mm | lbs | kg |
| 2 | 50 | 4034S6 | 3 | 76 | 5-9/32 | 141 | 4 | 1.8 |

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



June 2, 1998
Dwg No: S4034S6 Rev: G (1/24)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798