

Stainless Steel Check Valve

Model 80S6 **FLOMATIC®**



Sizes 3" & 4" / 75mm & 100mm

Flomatic Corporation

LEAD FREE
NSF/ANSI 61



Materials

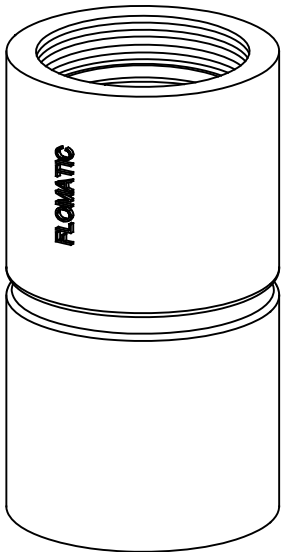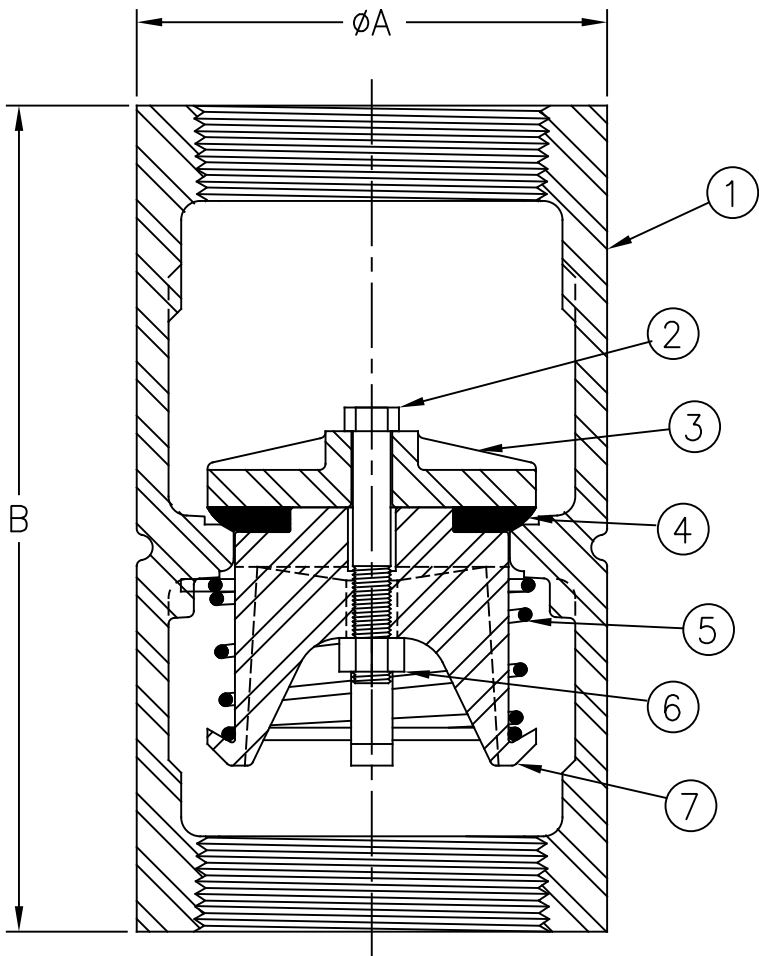

Max Temp 400°F (200°C)
Max Pressure 450psi (31bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body	Stainless Steel	316	5	1	Spring	Stainless Steel	316
2	1	Bolt	Stainless Steel	316	6	1	Nut	Stainless Steel	316
3	1	Dome	Stainless Steel	316	7	1	Guide	Stainless Steel	316
4	1	Disc	Viton	-----					

Dimensions (FNPT x FNPT)

ANSI B1.20.1

Size		Part #	A		B		Weight	
inch	mm		inch	mm	inch	mm	lbs	kg
3	75	7938S6	4-1/2	114	8-1/8	206	10	4.5
4	100	7939S6	5-3/4	146	10-1/4	260	25	11.3

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2024 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



October 21, 1997
Dwg No: S80s346 Rev: G (1/24)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798