


# Stainless Steel Check Valve

Sizes 1/4" thru 1/2" / 8 mm thru 13 mm

## Headloss Chart

Model CV80S6

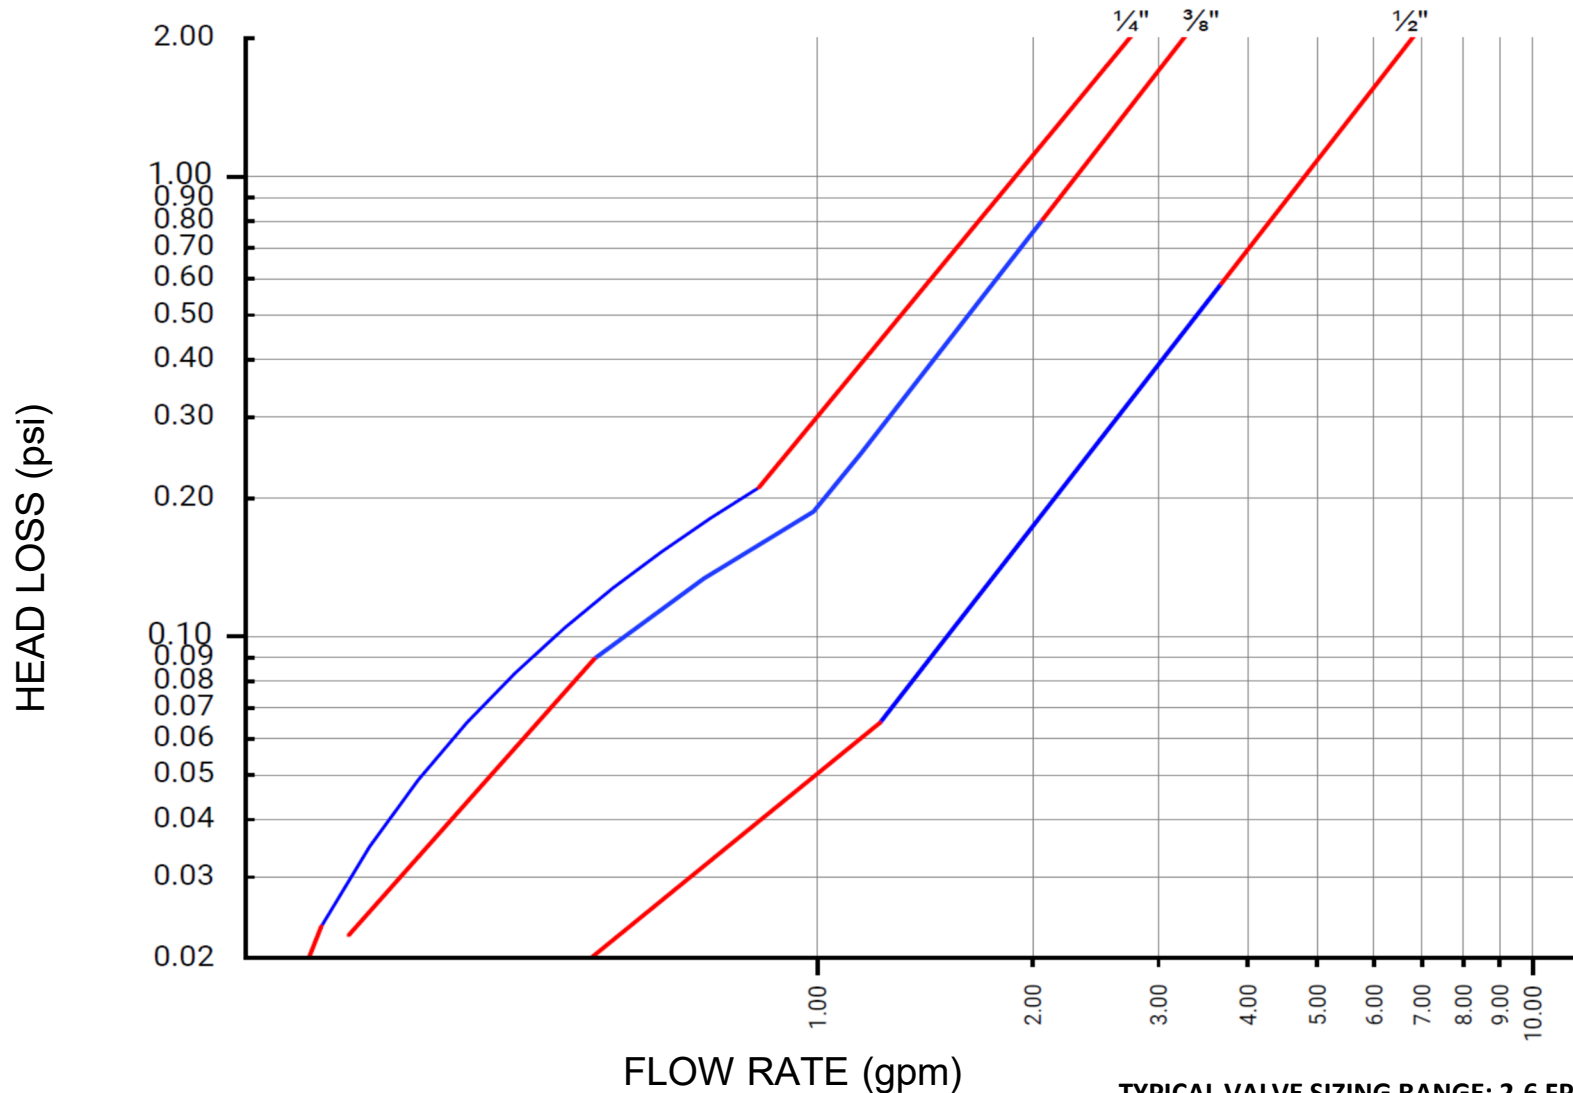

Size	1/4"	3/8"	1/2"
Cv	2	2.3	4.8

**TYPICAL VALVE SIZING RANGE: 2-6 FPS SHOWN IN BLUE**  
**FLOW OUTSIDE THE RECOMMENDED RANGE IS SHOW IN RED.**

Note: Calculated Data

Headloss charts are not to be used for valve sizing.

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2020 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. [www.flomatic.com](http://www.flomatic.com)



September 18, 2009  
Dwg No: SCV80SSHL Rev: F (8/24)

FLOMATIC CORPORATION  
GLENS FALLS, N.Y. 12801  
PHONE (518) 761-9797  
FAX (518) 761-9798