


Stainless Steel Check Valve Headloss Chart

Model 80S6VFD




Flomatic Corporation

LEAD FREE
NSF/ANSI 61



Sizes 2" thru 8" / 50 mm thru 200 mm

Headloss charts are not to be used for valve sizing

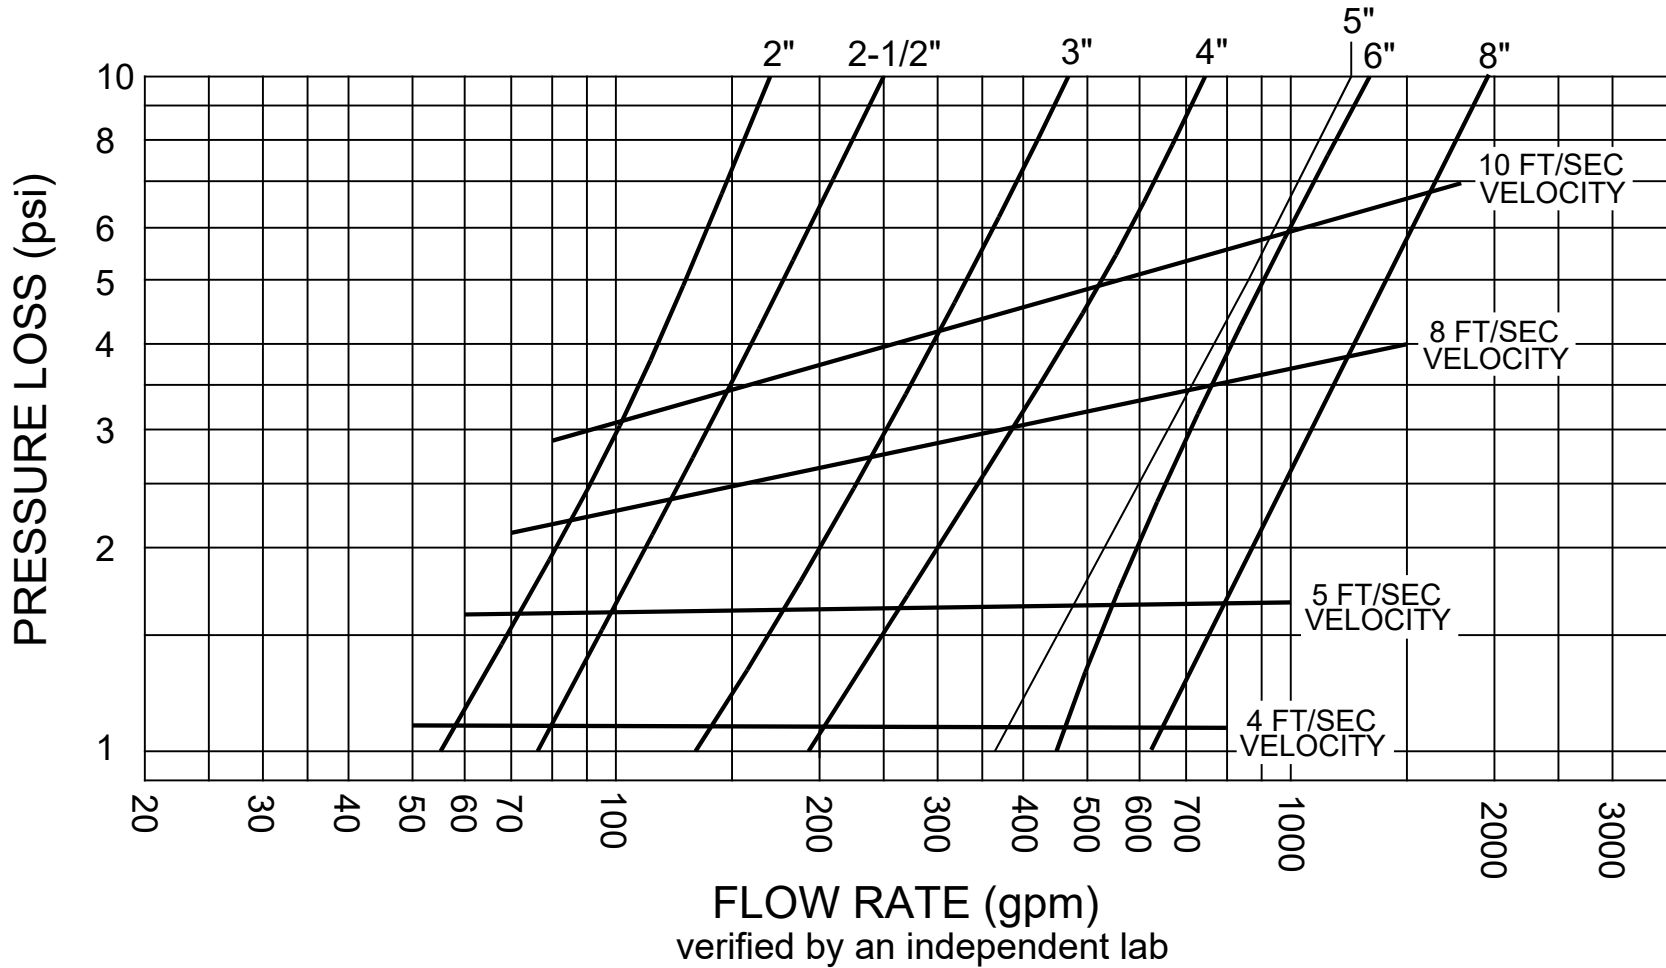

Size	2"	2-1/2"	3"	4"	5"	6"	8"
Cv	55	80	145	164	360	458	624

Note: For longer service life & higher efficiencies it is recommended that flow velocity be between 3 to 10 feet/second

FLOW RATE (gpm)
verified by an independent lab

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com