


Stainless Steel Check Valve Headloss Chart

Model 80S6VFD



Flomatic Corporation

Sizes 2" thru 8" / 50 mm thru 200 mm

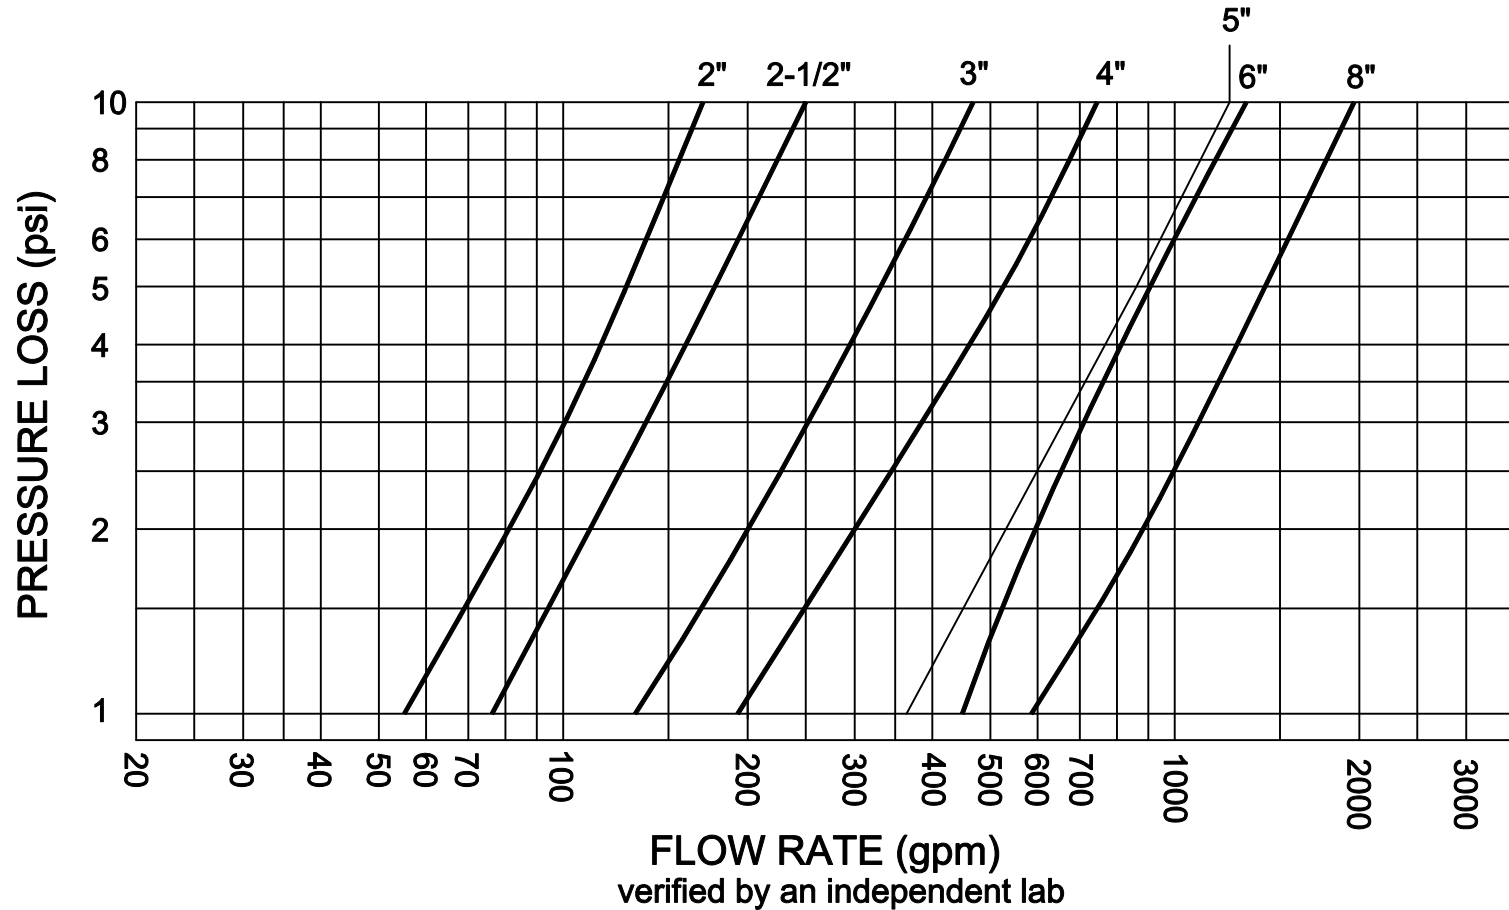

Note: For longer service life & higher efficiencies it is not recommended that flow velocities exceed 10 feet/second

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2012 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



September 12, 2013
Dwg No: S80S6VFDHL Rev: C (4/16)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 781-8797
FAX (518) 781-8798