

Stainless Steel Check Valve


Headloss Chart

Model 82, 80S6CL & MCLVFD



Flomatic Corporation

Sizes 2" thru 8" / 50 mm thru 200 mm

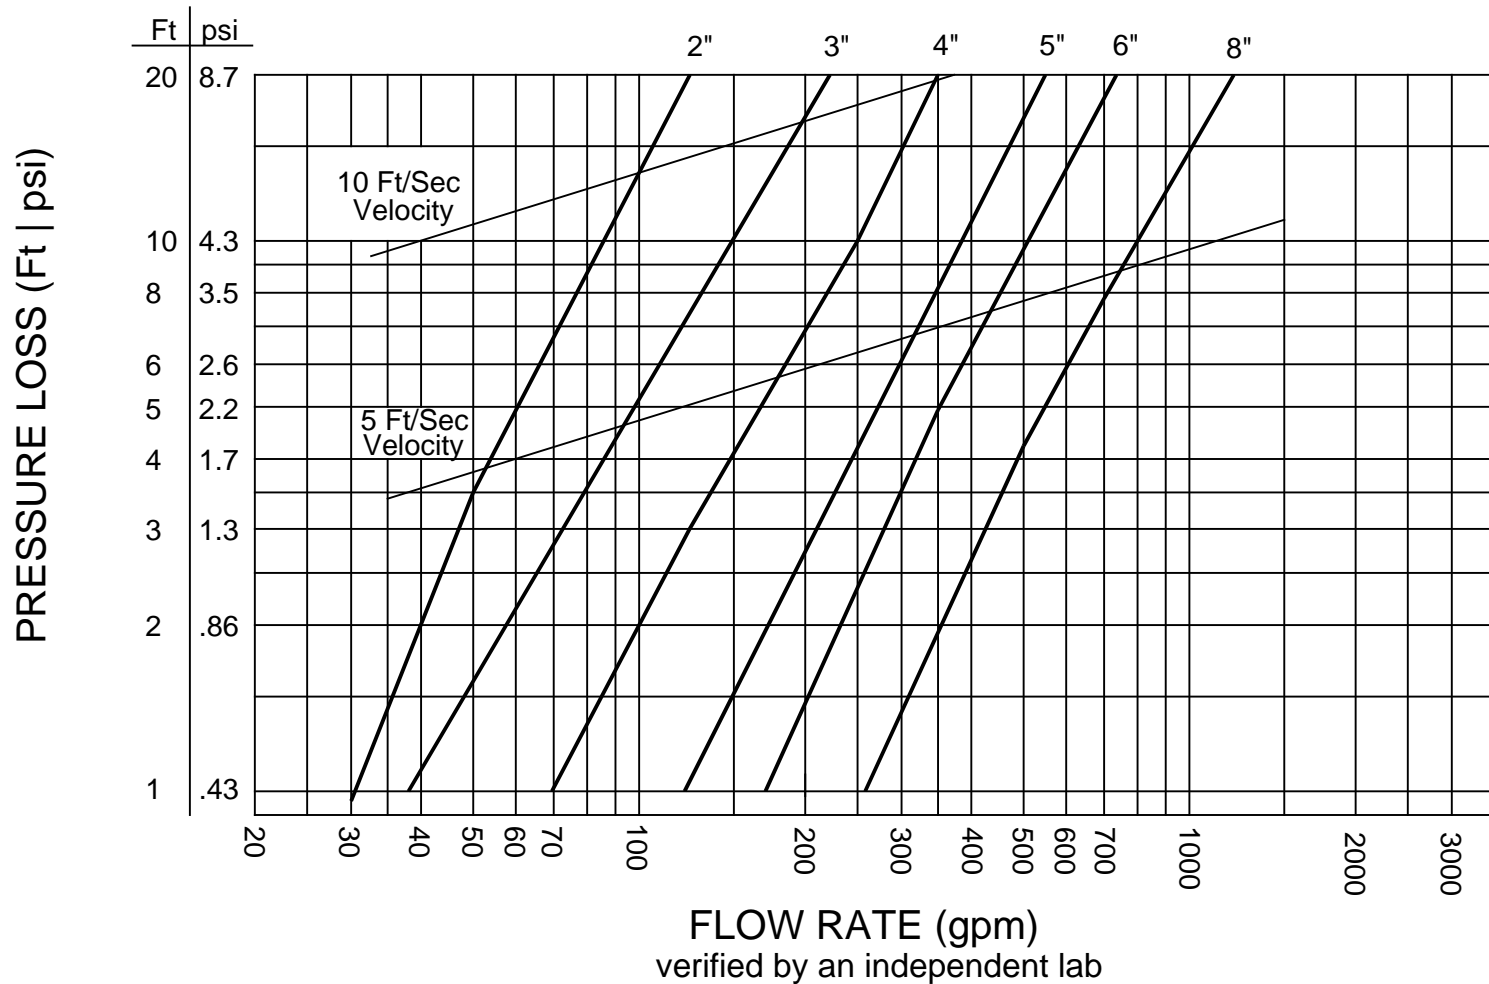

Note: For longer service life & higher efficiencies it is not recommended that flow velocities exceed 10 feet/second

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2018 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



August 31, 2017
Dwg No: S80S6CL_MCLVFDHL Rev: B (9/18)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798