


Silent Check Valve

Headloss Chart

Model 402/402R



Sizes 2" thru 24" / 50 mm thru 600 mm
Globe Style

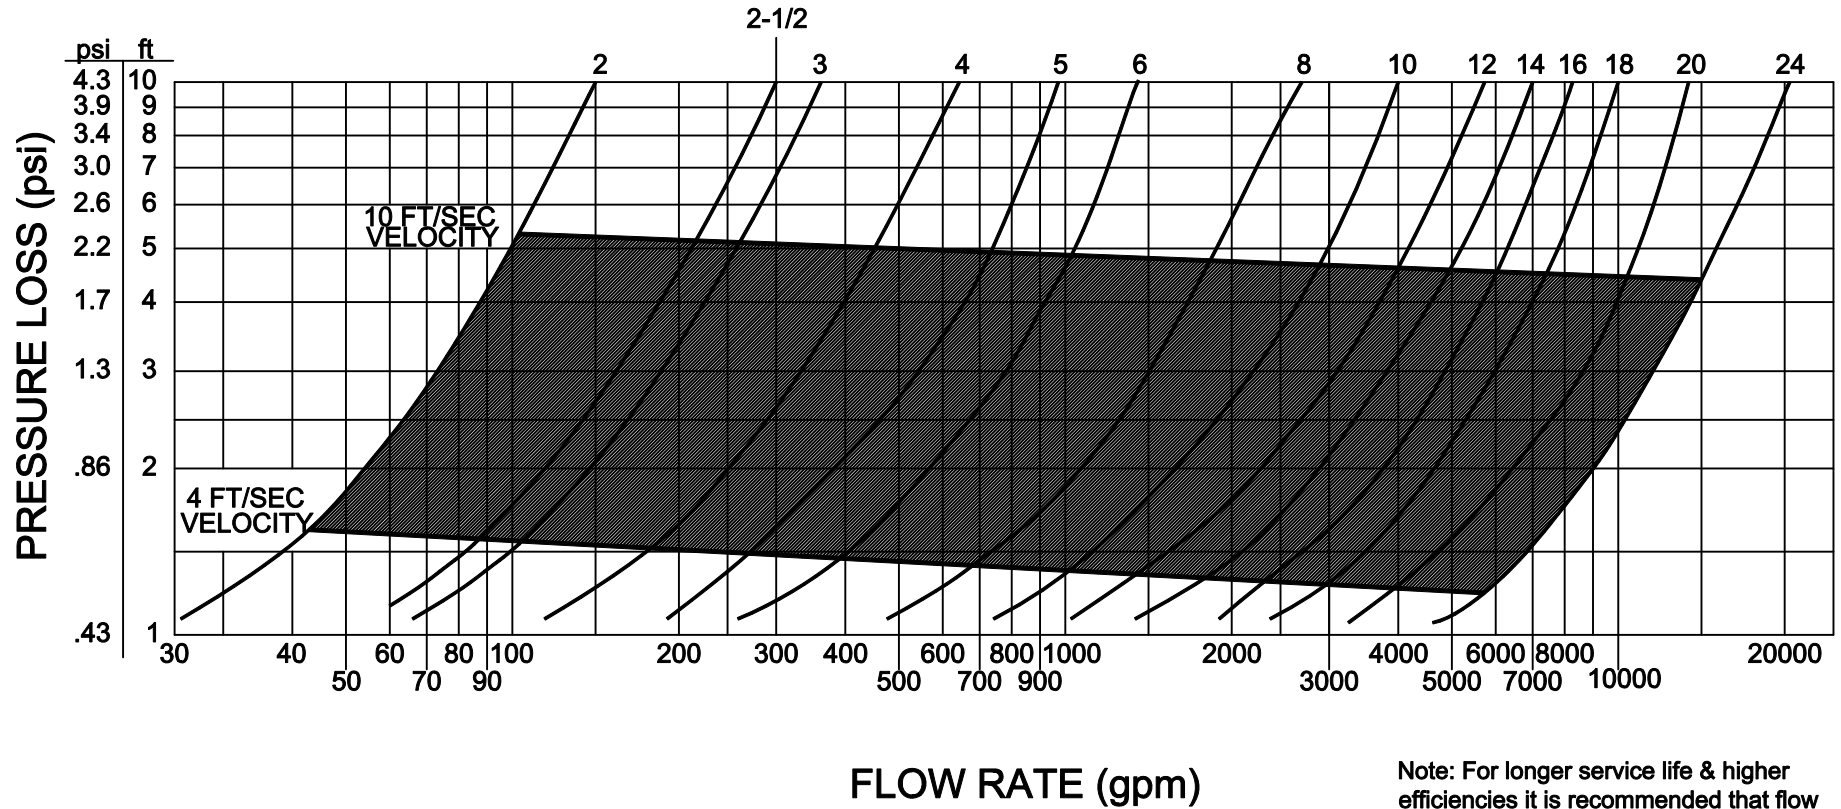

Note: For longer service life & higher efficiencies it is recommended that flow velocity be between 4 to 12 feet/second
2"-12" NSF APPROVED
PATENT # 6,024,121

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



May 12, 1994
Dwg No: S402BTHL Rev: K (7/15)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798