

Wafer Check Valve

Headloss Chart

Model 888/888R




Flomatic Corporation

LEAD FREE
NSF/ANSI 61



Sizes 2" thru 10" / 50 mm thru 250 mm
888ST, S6, STR & S6R INCLUDED

Headloss charts are not to be used for valve sizing

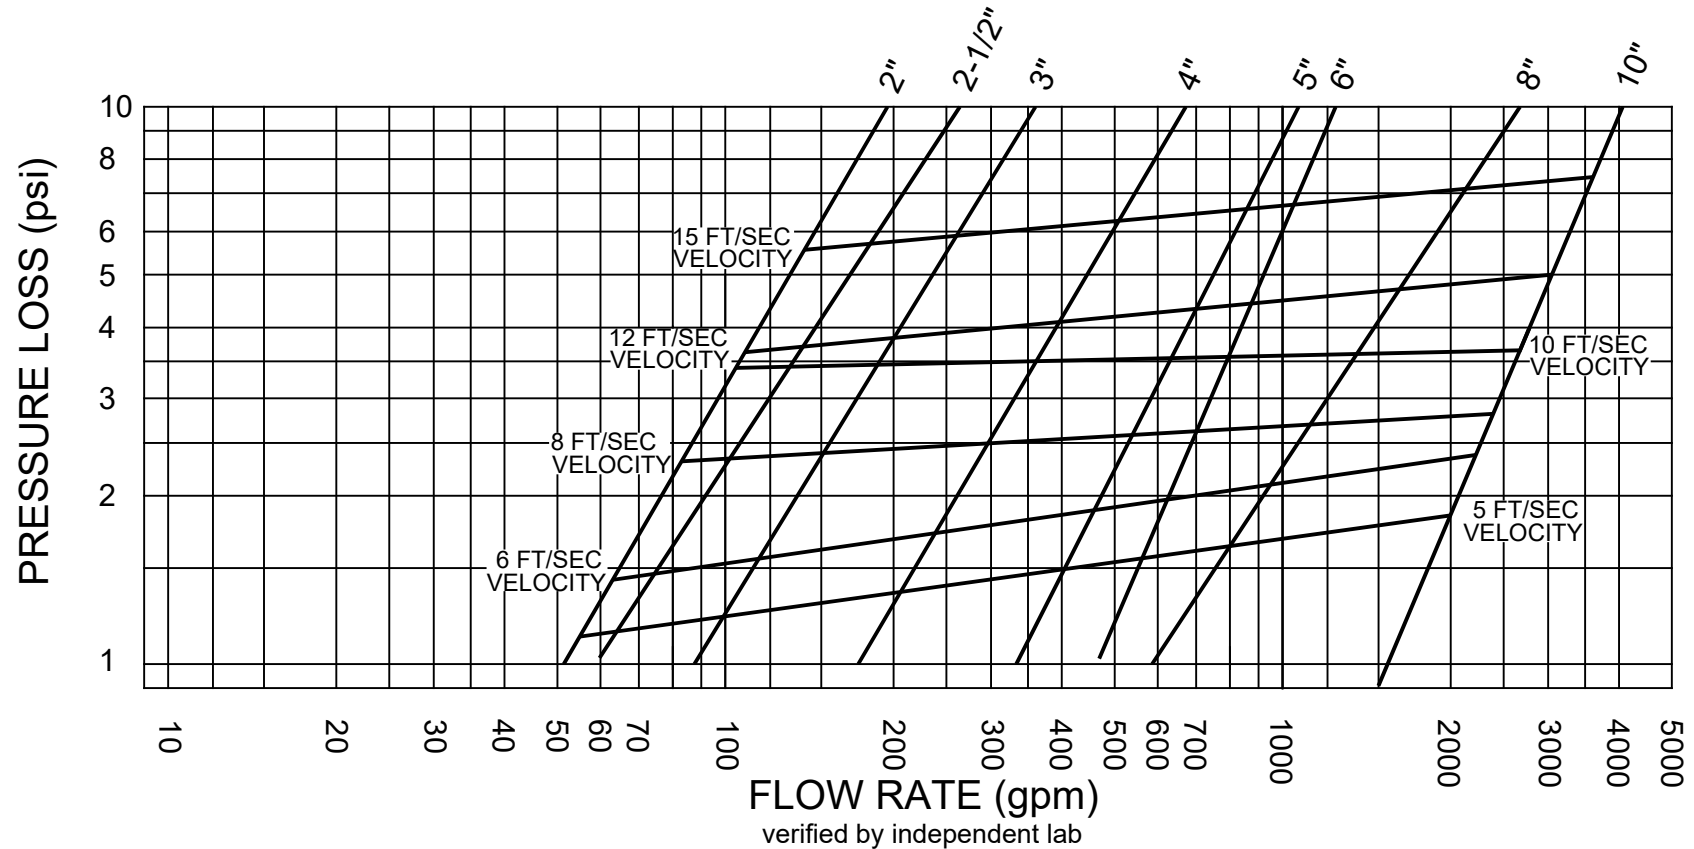

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"
Cv	8	57	50	206	356	395	614	1520

Note: For longer service life & higher efficiencies it is recommended that flow velocity be between 4 to 12 feet/second

PATENT # 6,024,121

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2022 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



December 28, 1994
Dwg No: S888HL Rev: H (1/22)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798