Silent Check Valve **Head Loss Chart** **Model 895**

FLOMATIC®
Flomatic Corporation

Size: 2" thru 24" / 50mm thru 600mm

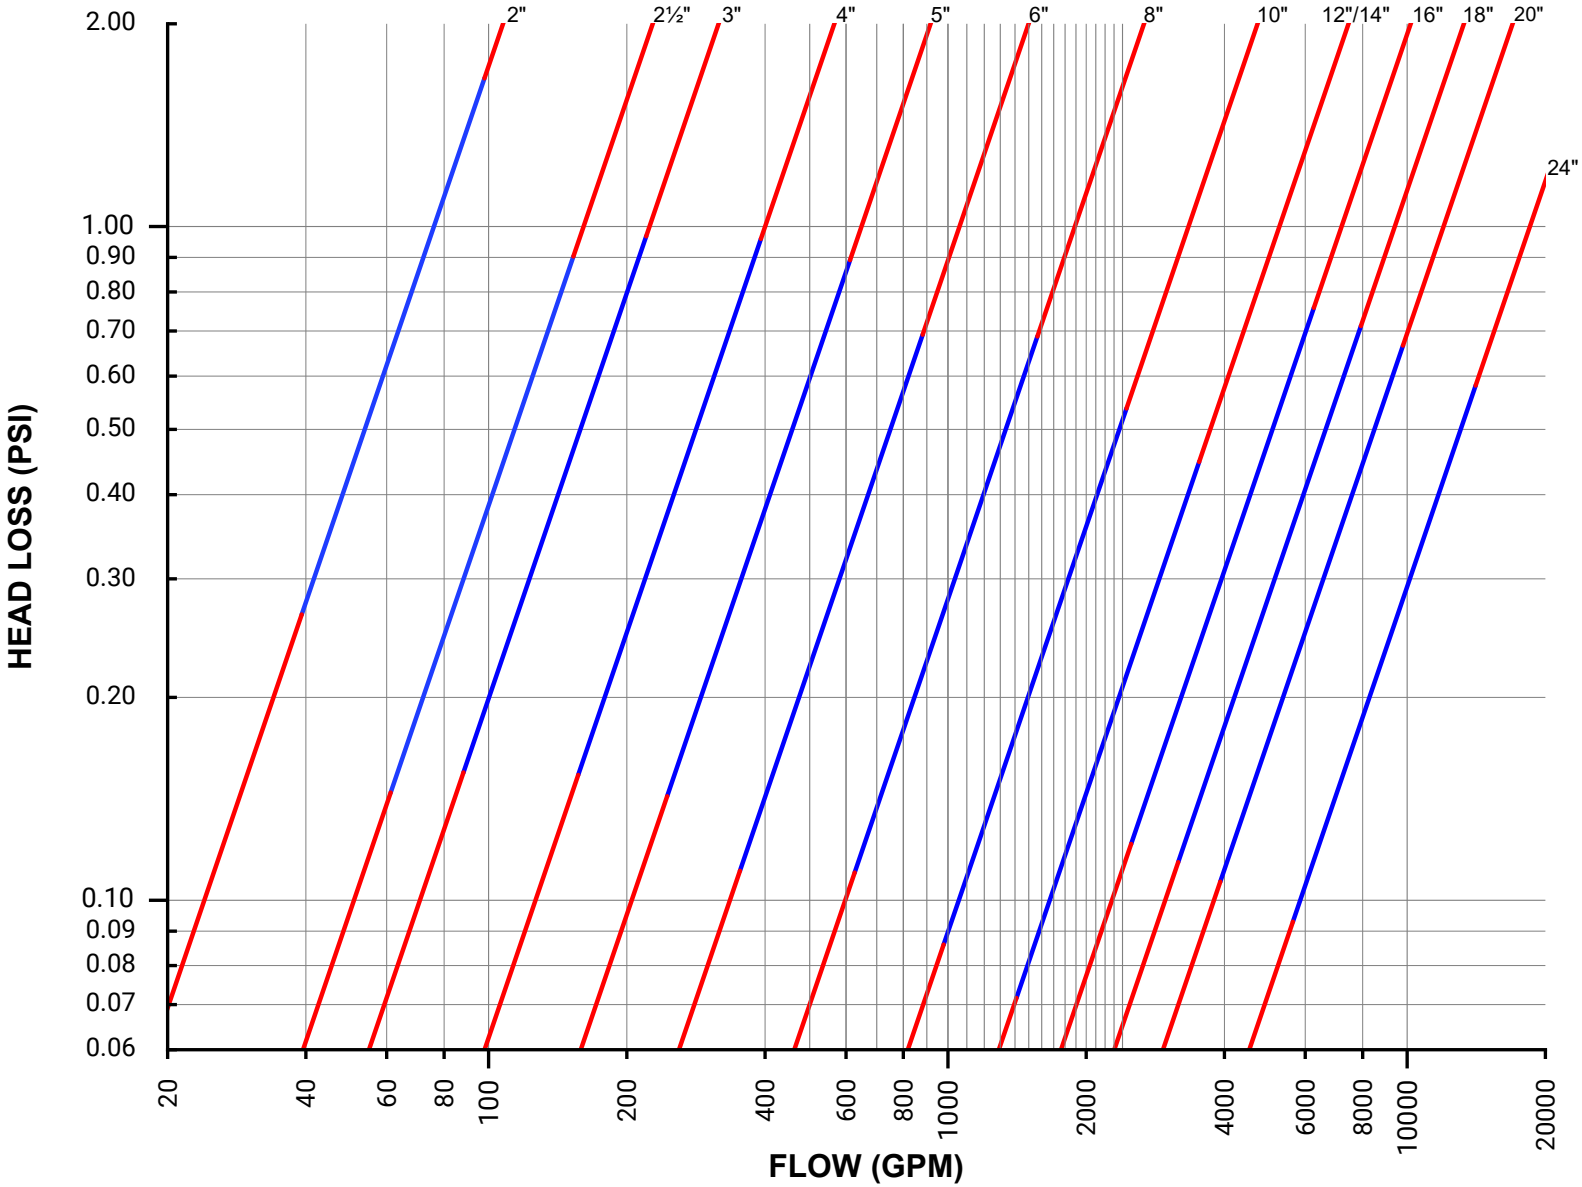

SIZE	2"	2½"	3"	4"	5"	6"	8"	10"	12"	14"	16"	18"	20"	24"
Cv	76	161	224	400	648	1060	1890	3340	5270	5200	7200	9400	12000	18500

NOTE: A flow velocity range or 4-10 feet per second, shown in blue is the recommended range for typical valve sizing. A larger valve should be considered if the operating velocity exceeds this range, and a smaller valve should be considered if the operation velocity falls below it.
Calculated Data

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed.All trademarks in this material are property of the respective companies. All rights reserved. ©2025 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com

FLOMATIC® VALVES

December 3, 1997
Dwg No: S895HL Rev: J (6/25)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798