

Wafer Check Valve

Silent Check


Model 888STR




Sizes 6" & 8" / 150 mm & 200 mm

Flomatic Corporation

Materials (Ductile Iron Body)

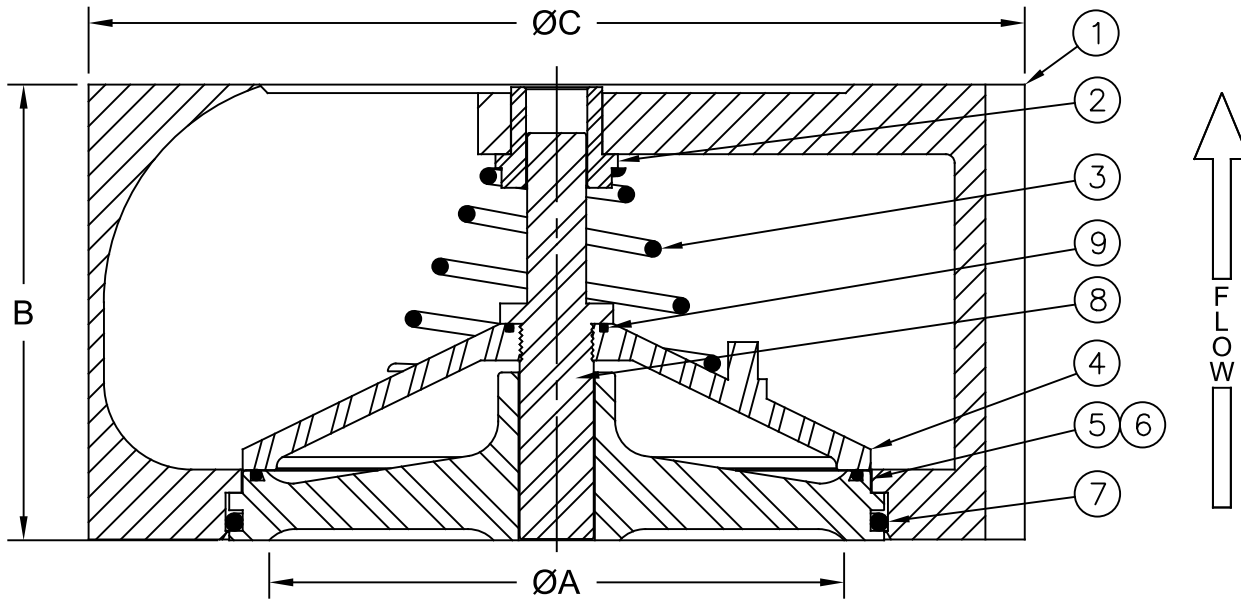

Max Temp 200°F (93°C)
 Max Inlet Pressure @ 150° F (65°C) 150# 300 psi (21bar)
 Max Inlet Pressure @ 150° F (65°C) 300# 500 psi (34bar)

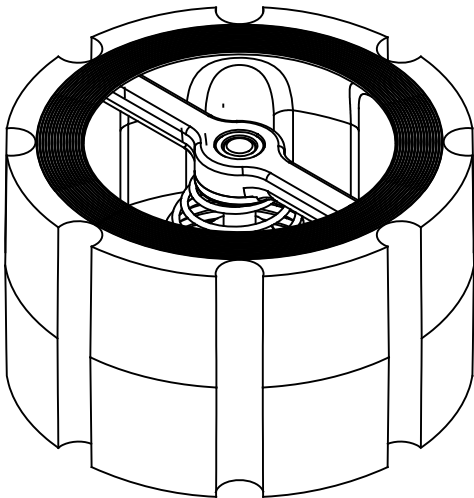

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	A536 65-45-12
2	1	Bushing	Stainless Steel	316
3	1	Spring	Stainless Steel	316
4	1	Poppet	Stainless Steel	CF8M 316
5	1	Seat Ring*	Stainless Steel	CF8M 316
6	1	O-Ring	EPDM	5778-70
7	1	O-Ring	EPDM	5778-70
8	1	Stem	Stainless Steel	316
9	1	O-Ring	EPDM	5778-70

*OPTIONAL METAL TO METAL SEAT AVAILABLE, REMOVE "R" FROM PART NUMBER

Dimensions

MSS SP-125 Compliant
 PATENT # 6,024,121

Size		Part #	ØA		B		ØC		Weight		# of Bolts		Bolt Size by Flange	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg	150#	300#	150#	300#
6	150	2437STR	6-19/64	160	5-1/2	140	9-3/4	248	36	16.5	8	12	3/4 X 8-3/4	3/4 X 10
8	200	2438STR	8-11/32	212	6-1/2	165	13-3/8	340	80	36	8	N/A	3/4 X 9	N/A

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2021 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



November 16, 2012
 Dwg No: S888-2ST Rev E (2/21)

FLOMATIC CORPORATION
 GLENS FALLS, N.Y. 12801
 PHONE (518) 761-9797
 FAX (518) 761-9798