



Wafer Check Valve Silent Check Model 888ST



Sizes 6" & 8" / 150 mm & 200 mm

Flomatic Corporation

Materials (Cast Iron Body)

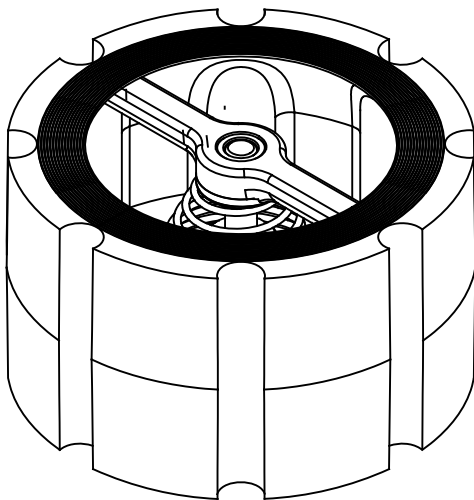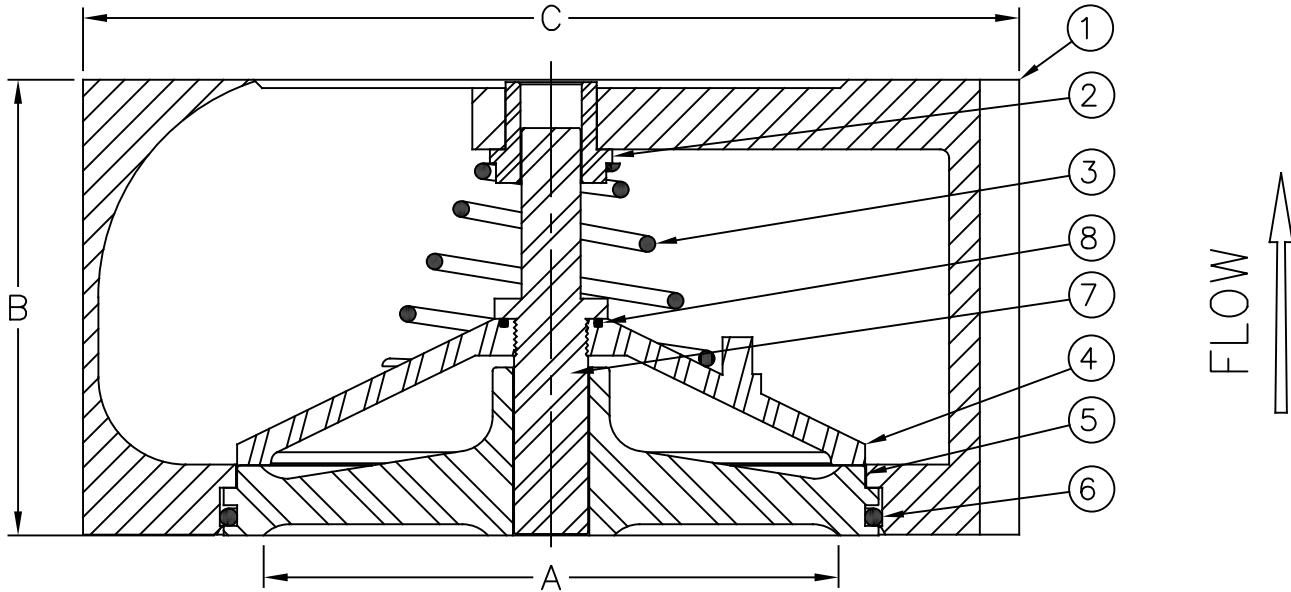

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Cast Iron	A126, Class B
2	1	Bushing	Stainless Steel	316
3	1	Spring	Stainless Steel	316
4	1	Poppet	Stainless Steel	CF8M 316
5	1	Seat Ring*	Stainless Steel	CF8M 316
6	1	O'Ring	EPDM	5778-70
7	1	Stem	Stainless Steel	316
8	1	O'Ring	EPDM	5778-70

*OPTIONAL RESILIENT SEAT AVAILABLE, ADD "R" TO THE PART NUMBER
Max Temp 250°F (121°C)

Max Inlet Pressure @ 150° F (65°C) 125# 200 psi (14bar)

Max Inlet Pressure @ 150° F (65°C) 250# 400 psi (27bar)

PATENT # 6,024,121

Dimensions

Size		Part #	ØA		B		ØC		Weight		# of Bolts		Bolt Size by Flange	
inch	mm		inch	mm	inch	mm	inch	mm	lbs	kg	125#	250#	125#	250#
6	150	2437ST	6-19/64	160	5-1/2	140	9-3/4	248	36	16.5	8	12	3/4 X 8-3/4	3/4 X 10
8	200	2438ST	8-11/32	212	6-1/2	165	13-3/8	340	80	36	8	N/A	3/4 X 9	N/A

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2019 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com



November 16, 2012
Dwg No: S888-2ST Rev C (7/19)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798