


Materials

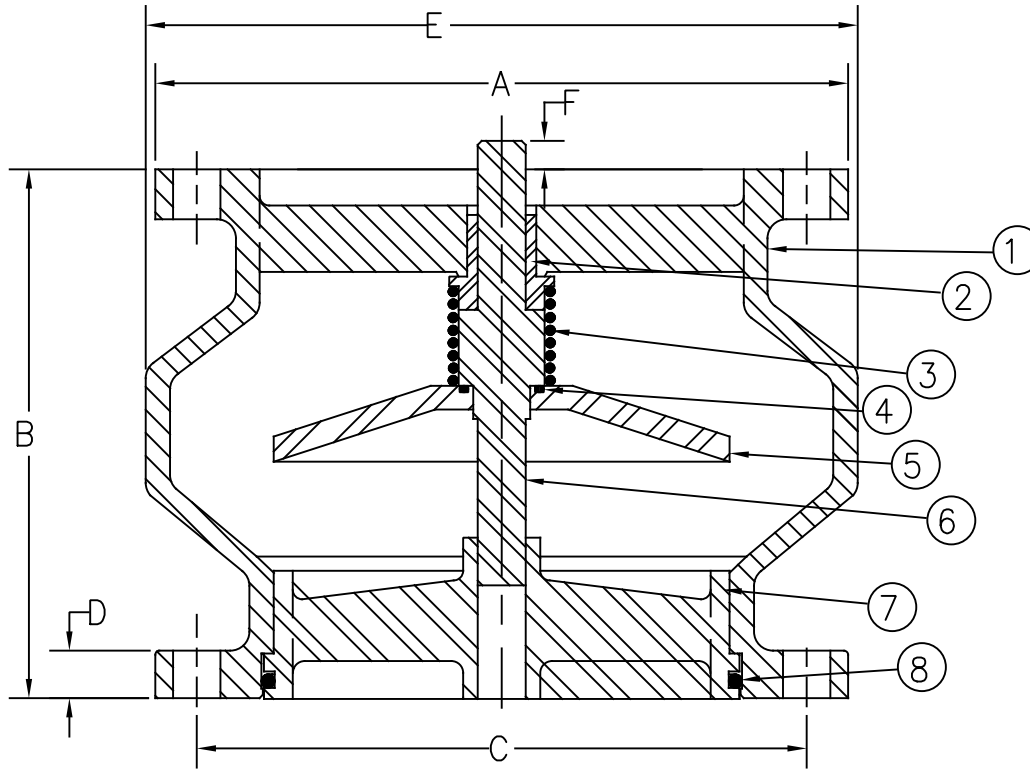

Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	65-45-12
2	1	Bushing	Stainless Steel	316
3	1	Spring	Stainless Steel	316
4	1	O'Ring	EPDM	5778-70
5	1	Poppet	Stainless Steel	316
6	1	Stem	Stainless Steel	316
7	1	*Seat Ring	Stainless Steel	316
8	1	O'Ring	EPDM	5778-70

*OPTIONAL RESILIENT SEAT AVAILABLE, ADD "R" TO THE PART NUMBER

Max Temp 180°F (82°C)
Max Inlet Pressure 200psi (14bar)

Patent # 6,024,121

Dimensions

Size		Part #	ØA		B		ØC		D		ØE		F		Weight		Bolt Size	# of Bolts
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg		
12	300	2248ST	19	483	14-1/2	368	17	432	1-1/4	32	19-1/2	495	13/16	21	306	139	7/8	12

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2019 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited. www.flomatic.com