



Wafer Check Valve

Headloss Chart

Model 888VFD **FLOMATIC**

Sizes 2" thru 6" / 50 mm thru 150 mm
888S6VFD INCLUDED

Flomatic Corporation

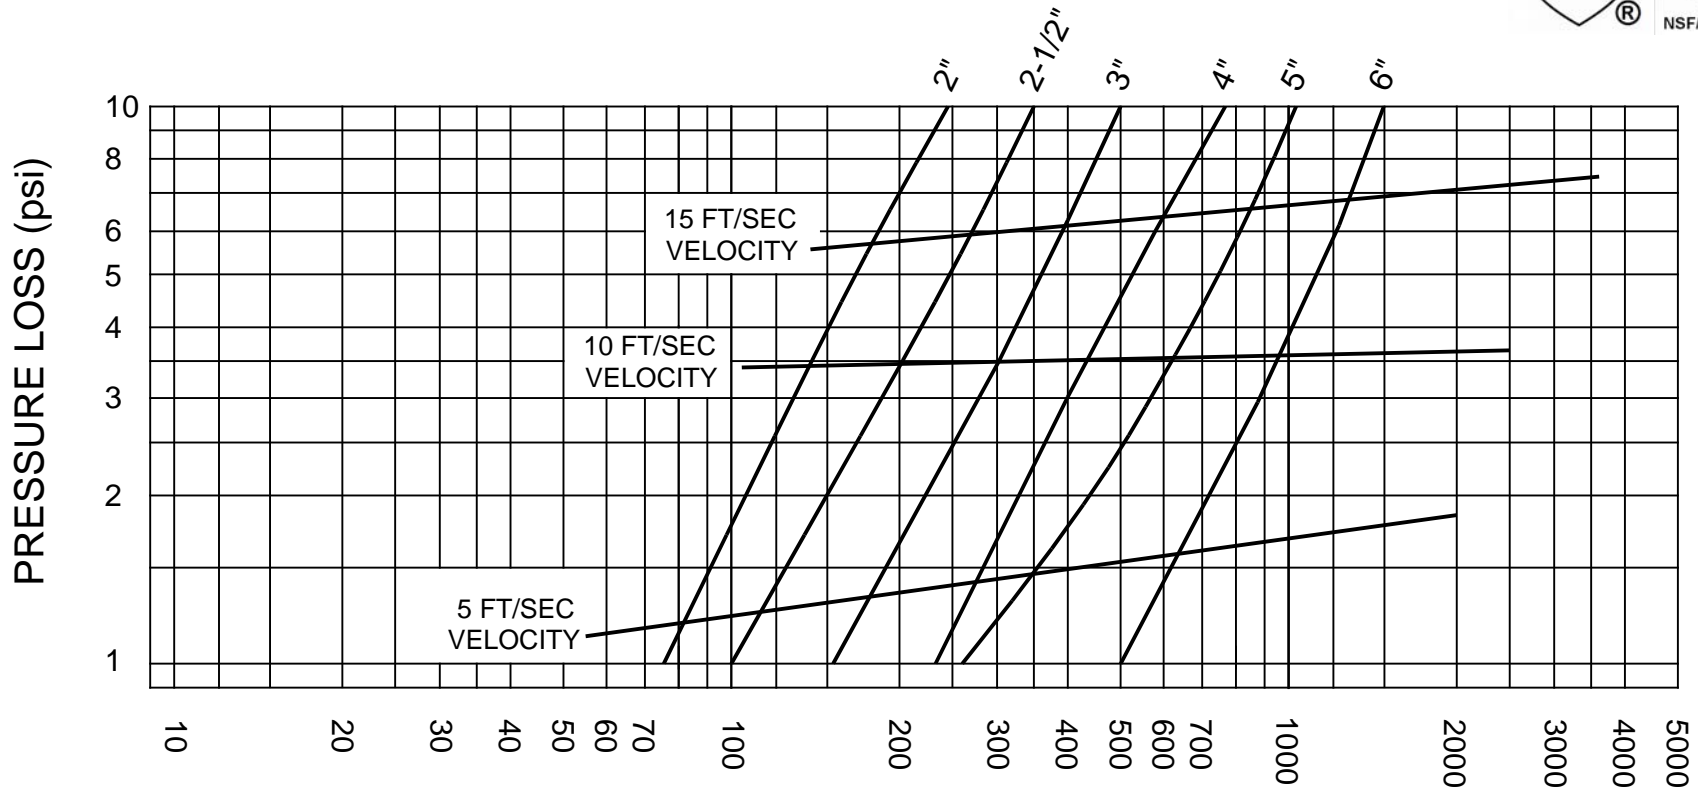

FLOW RATE (gpm)
verified by independent lab

Note: For longer service life & higher efficiencies it is recommended that flow velocity be between 4 to 10 feet/second

PATENT # 9,611,948

Flomatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Flomatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2017 Flomatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Flomatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Flomatic Corporation is strictly prohibited.



April 27, 2017
Dwg No: S888VFDHL Rev: D (11/17)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798