

Swing Check Valves



Headloss Chart

Model 78A



Fromatic Corporation

Sizes 3" thru 10" / 75mm & 250mm

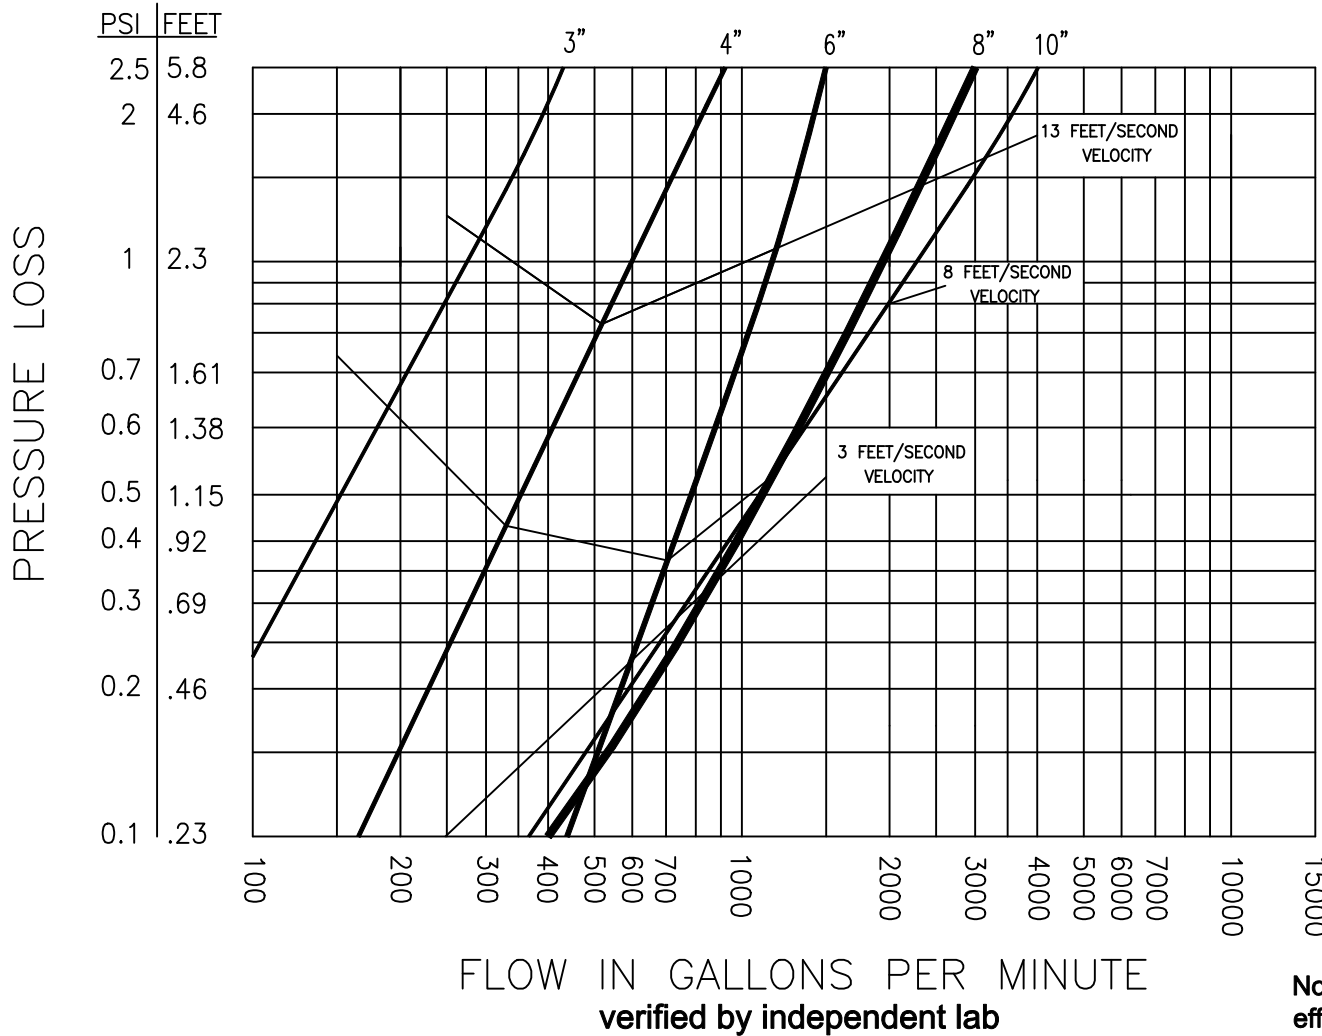

Note: For longer service life & higher efficiencies it is recommended that flow velocities be between 3 to 8 feet/second

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All right reserved. ©2011 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited.



February 4, 2003
Dwg No: S78AHL Rev: D (7/16)

FLOMATIC CORPORATION
GLENS FALLS, N.Y. 12801
PHONE (518) 761-9797
FAX (518) 761-9798