



Sizes 10" & 12" / 250 mm & 300 mm
 AIS COMPLIANT-MADE IN THE USA

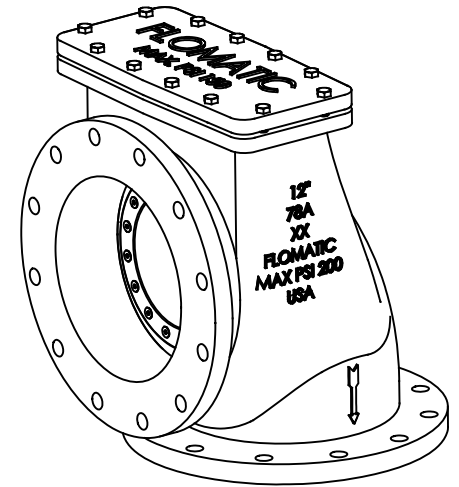

Materials

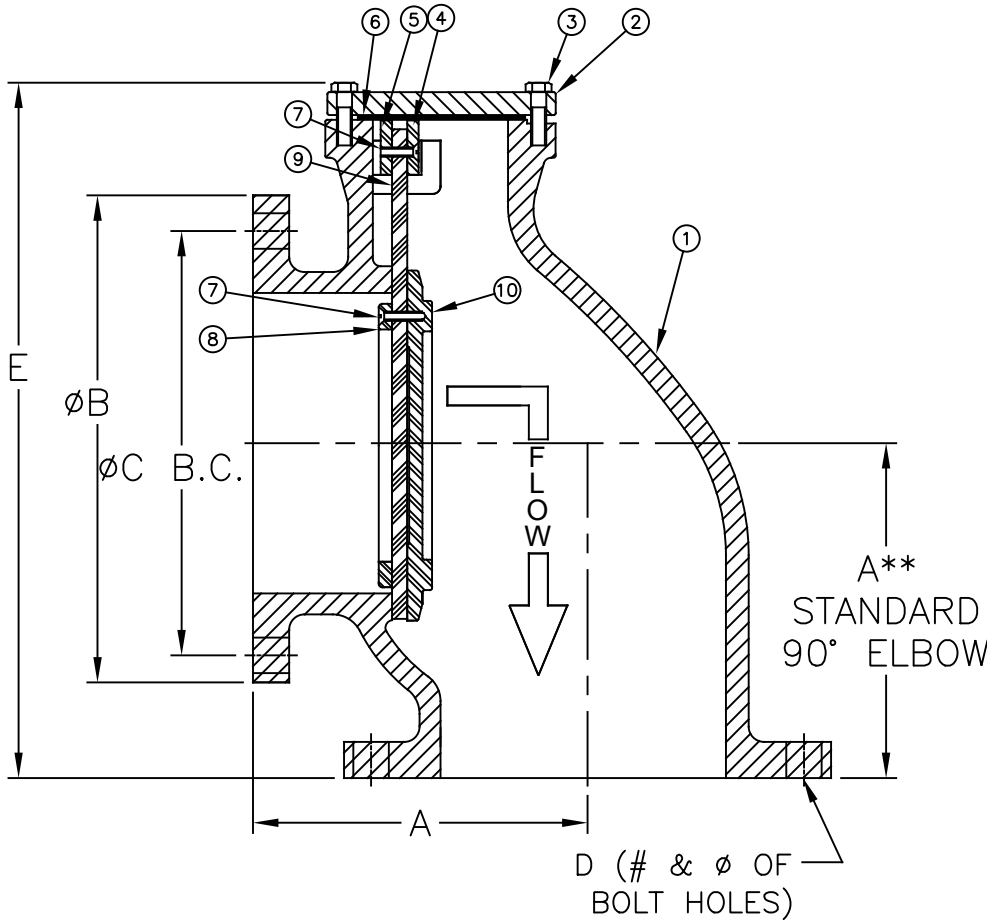

Max Temp 140°F (60°C)
 Max Inlet Pressure 200psi (14bar)

Item #	Qty	Description	Material	ASTM	Item #	Qty	Description	Material	ASTM
1	1	Body (Epoxy Coated)	Ductile Iron	A536 65-45-12	6	1	Cover Gasket	Buna-n	----
2	1	Cover (Epoxy Coating)	Ductile Iron	A536 65-45-12	7	A/R	FHCS	Stainless Steel	18-8
3	A/R	Cover Bolts	Stainless Steel	18-8	8	1	Flapper Ring (Epoxy Coating)	Cast Iron	A126, Class B
4	1	Flapper Support (Epoxy Coating)	Steel	----	9	1	Flapper	Rubber	----
5	1	Flapper Support (Epoxy Coating)	Steel	----	10	1	Flapper Plate (Epoxy Coating)	Cast Iron	A126, Class B

Dimensions (150# ANSI B16.42 Flanges)

Size		Part #	A		B		C		D		E (REF)		Weight	
inch	mm		inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	lbs	kg
10	250	2187A	11	280	16	406	14-1/4	362	(12) 1	25	23-7/32	590	335	152
12	300	2188A	12	279	19	483	17	432	(12) 1	25	25-1/2	648	432	196

Fromatic Corporation can accept no responsibility for possible errors in catalogues, brochures and other printed material. Fromatic Corporation reserves the right to alter its products without notices. This also applies to product already agreed. All trademarks in this material are property of the respective companies. All rights reserved. ©2023 Fromatic Corporation. The drawings & information on this drawing sheet are the sole & exclusive property of Fromatic Corporation. Any reproduction, distribution, display or use of these drawings or information in whole or in part without written authorization of Fromatic Corporation is strictly prohibited. www.fromatic.com